


## GLO-BALL BASIC 1

Designed by Jasper Morrison, 1998


F3021000

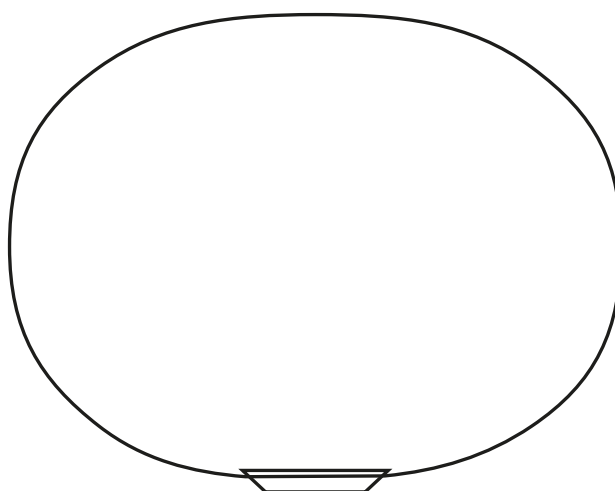

# GLO-BALL BASIC 1

F3021000

EN

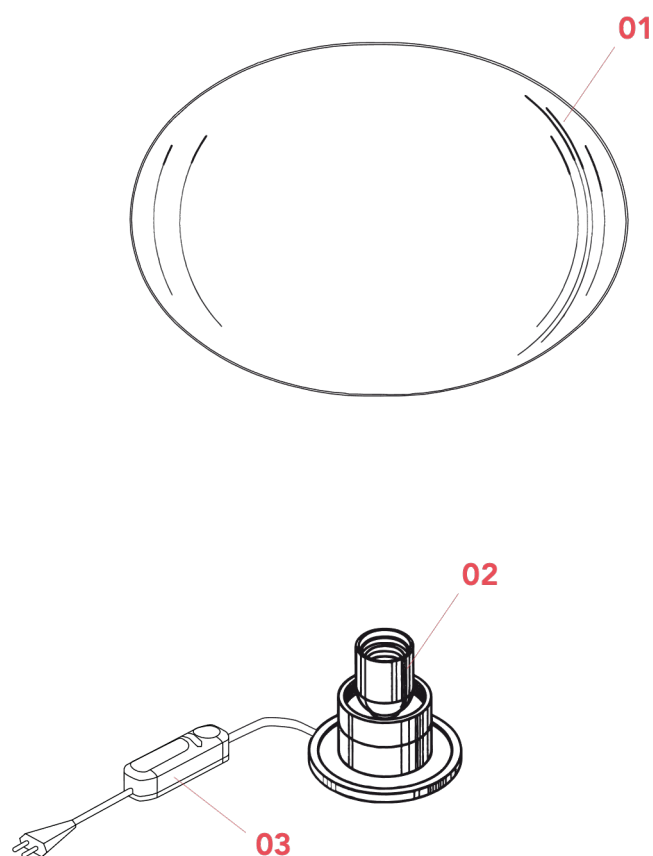

01. F3050061 – White diffuser

02. RF2500200 – Lamp holder assembly

03. RF28206 – Led dimmer 1004P LFP100-240V 4-150WHL 4-25W



**GLO-BALL BASIC 1 F3021000**


**EN**

## F3050061

WHITE/GREY DIFFUSER 1



Diameter of the fixing metal ring Glo-Ball 1

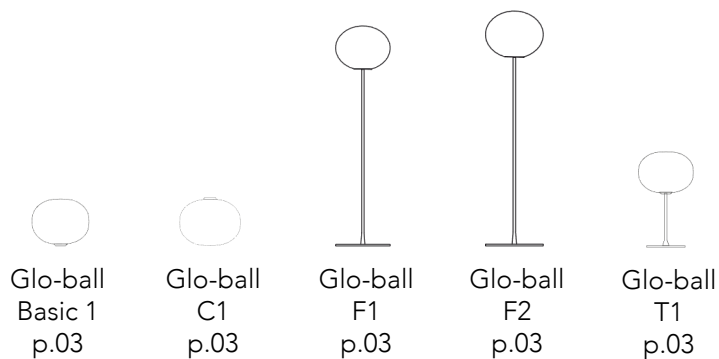

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - [www.flos.com](http://www.flos.com)  
Flos reserves the right to introduce any changes to its own models, without prior notice.

GLO-BALL BASIC 1 F3021000

EN

**F3050061**

WHITE/GREY DIFFUSER 1

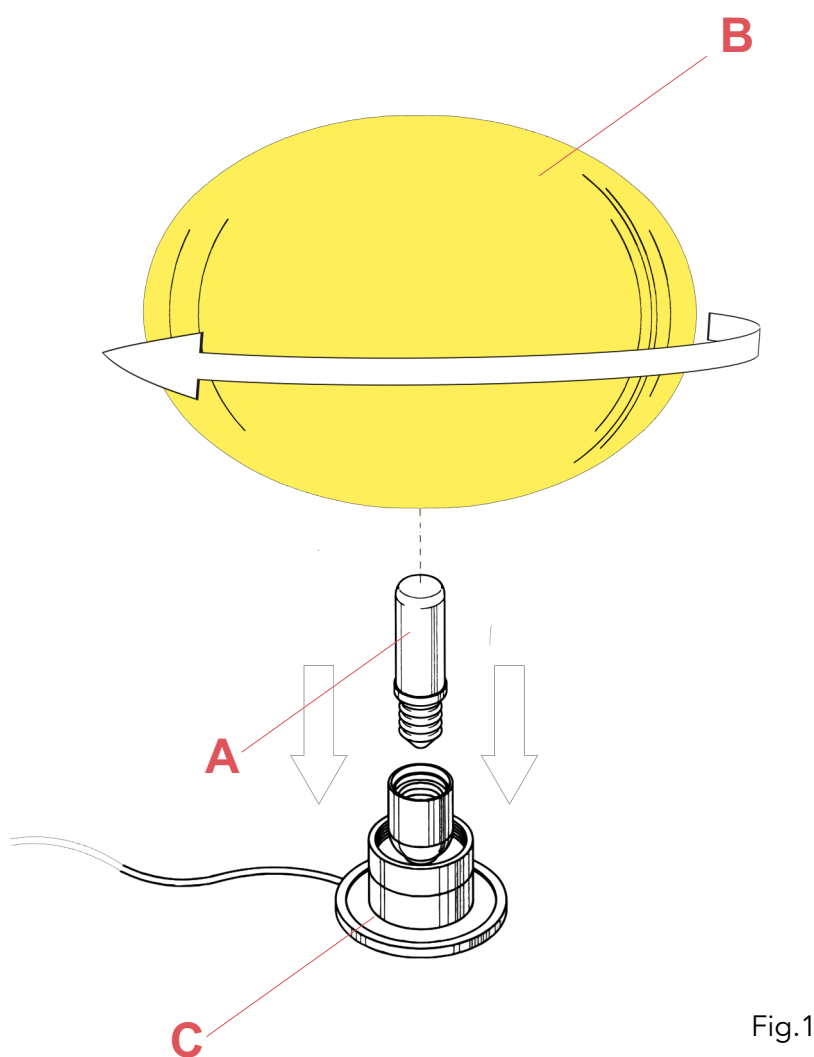


Fig.1

Insert the bulb (A). Position the diffuser (B) on the support (C) and secure it, turning it clockwise.

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - [www.flos.com](http://www.flos.com)  
Flos reserves the right to introduce any changes to its own models, without prior notice.

GLO-BALL BASIC 1 F3021000

EN

RF2500200

LAMP HOLDER ASSEMBLY



Frisbi  
p.15



Glo-ball  
Basic 1  
p.08



Glo-ball  
Basic 2  
p.08



Glo-ball  
C1  
p.05



Glo-ball  
C2  
p.05



Glo-ball  
F1  
p.09



Glo-ball  
F2  
p.09



Glo-ball  
F3  
p.09



Glo-ball  
S1  
p.05



Glo-ball  
T1  
p.05

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

## RF2500200

### LAMP HOLDER ASSEMBLY



Fig.1



Fig.2

Remove the base cover (A) by turning the assembly upside down, insert a flat headed screw driver inside one of the openings and then force it to open.

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - [www.flos.com](http://www.flos.com)  
Flos reserves the right to introduce any changes to its own models, without prior notice.

## RF2500200

### LAMP HOLDER ASSEMBLY

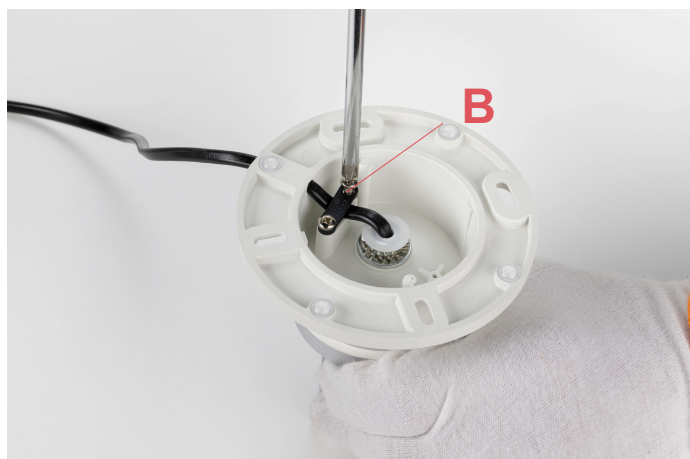


Fig.3

Remove the cable clamp (B) by unfastening the 2 screws.



Fig.4

Pull the electrical cable (C) in away that when removing the lamp holder you have some spare extension cable. This operation is done for an easier removal of the lamp holder.

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

## RF2500200

### LAMP HOLDER ASSEMBLY



Fig.5

Turn the assembly around.

Remove the lamp holder.

Insert a flat headed screw driver inside the opening of the lateral clamp and unhook the lamp holder (D) from the support. Repeat the same operation also for the opposite side.



Fig.6

Remove the lamp holder from its support and disconnect the electrical wires by pressing the push terminals with a paper clip (E) or something similar.

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

GLO-BALL BASIC 1 F3021000

EN

## RF2500200

LAMP HOLDER ASSEMBLY



Fig.7



Fig.8

Cut-off the cable tie (F) and remove the cable isolator (G) from the electrical cable.

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.



## RF2500200

### LAMP HOLDER ASSEMBLY



Fig.9

Unfasten the locking screw (H) by utilizing a tiny flat headed screw driver.



Fig.10

Remove the lamp holder support (I) by unfastening it from the assembly.

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.



## RF2500200

### LAMP HOLDER ASSEMBLY



Fig.11



Fig.12



Fig.13

Assemble now the new spare-part:  
Tighten the lamp holder support (I) onto the assembly and then fasten the locking screw (H) by utilizing a flat headed screw driver. Insert the isolator (F).

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

## RF2500200

LAMP HOLDER ASSEMBLY



Fig.14



Fig.15

Connect the electrical wires to the lamp holder by utilizing always the paper clip. Connect the Brown "L" (live) wire in the terminal that corresponds (opposite side) to the centre brass contact of the lamp holder and then connect the Blue "N" (neutral) wire in the other terminal.

N.B. The electrical wires are connected by pushing the wires inside the terminals, therefore it is necessary to verify that they are connected properly.

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

## RF2500200

LAMP HOLDER ASSEMBLY



Fig.14

Now reassembly the lamp:

Hook the lamp holder (D) on the support (I).  
Turn up-side down the assembly around and pull back the electrical cable (C).(Fig.4 page 7)

Position the electrical cable between the two threaded holes and fix the cable clamp (B) by fastening the 2 screws.(Fig.3 page 7)

Position the cover base (A) on top of the assembly (the holes of the cover must correspond with the plastic pins of the assembly) and then push down on the cover so that it clicks onto the assembly.(Fig.2 page 6)



Fig.15

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

GLO-BALL BASIC 1 F3021000

EN

## RF28206

LED DIMMER 1004P LFP100-240V 4-150WHL 4-25W



Bedside  
Gun  
p.12



Chiara T  
p.03



Glo-  
ball  
Basic 0  
p.11



Glo-  
ball  
Basic 1  
p.14



Glo-  
ball  
Basic 2  
p.05



Glo-  
ball T1  
p.11



Ic T1  
High  
p.08



Ic T1  
Low  
p.08



Ic T2  
p.08




Ktribe T1  
p.05



Ktribe T2  
p.05



Miss  
K  
p.13



Ray T  
p.17




Romeo  
Moon  
T1  
p.32



Romeo  
Soft T1  
p.32



Spun  
Light  
T1  
p.12



Spun  
Light  
T2  
p.12



Table  
Gun  
p.12

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

**GLO-BALL BASIC 1 F3021000**

**EN**

## RF28206

LED DIMMER 1004P LFP100-240V 4-150WHL 4-25W



Fig.1



Fig.2

Open the dimmer box of the damaged dimmer.  
For the opening, it is necessary to remove the n°2 screws using a star screw driver.

Lift-up the dimmer casing from the dimmer base;

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - [www.flos.com](http://www.flos.com)  
Flos reserves the right to introduce any changes to its own models, without prior notice.



## RF28206

LED DIMMER 1004P LFP100-240V 4-150WHL 4-25W

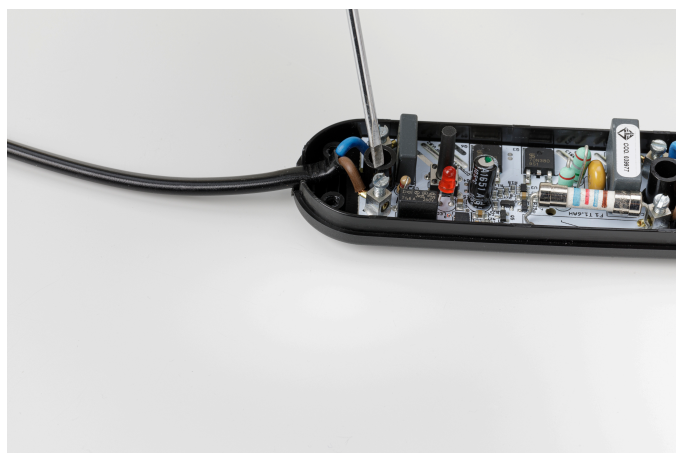


Fig.3

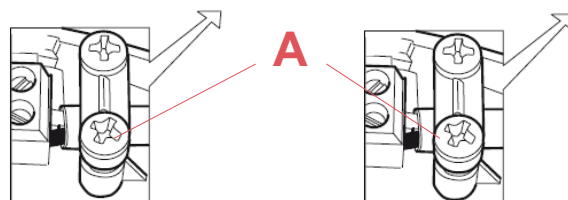


Fig.3.1

Remove the cable clamps by unfastening the 4 screws (A) and disconnect the wires from the terminal blocks through a tiny flat headed screw driver;



Fig.4

Replace the dimmer and connect the wires. When connecting the wires it is necessary to respect the polarities (L = Brown and N = Blue) to the terminal box.

Lock the electrical cables by fastening the screws (A) of the cable clamps and make sure to block the isolation of the electrical cable.

Close the dimmer box.

It is necessary to place the casing on top and press down until it locks in. it is necessary to insert the n°2 screws using a star screw driver