

## AROA with acrylic glass diffuser Pendant lamps



### Product description

Art. No.: 4131.120.40.0 DIG  
 Product name: AROA pendant lamp  
 Housing colour: natural anodised  
 Material: Extruded aluminium  
 Equipment: For mounting on the ceiling, 2 nickel-plated copper cables, transparently sheathed length 2500 mm, continuously adjustable height  
 Dimensions (mm): 1200 x 28 x 32  
 Optics/light technology: acrylic glass diffuser opal  
 Weight (kg): 1.40  
 Protection level: IP 20  
 Protection class: I  
 Control gear: PS 230 V/50 Hz (in a separate housing)  
 Lighting control: DALI/TouchDIM


### Light specification/technical data

Lamp: LED  
 System power (W): 23  
 Light flux (lm/lamp): 2730  
 Luminous efficiency (lm/W): 119  
 Colour temperature (K): 4000  
 Colour rendering index (CRI): >90  
 Unified glare rating (UGR): 25  
 Light distribution: All-round beam  
 Lifetime: 50'000h L90 B10 (Ta 25° C)  
 Energy efficiency: D  
 Colour consistency (MacAdam): 3


**Specification text/Description:** Article: 4131.120.40.0 DIG; Article name: AROA pendant lamp; Description: With perfect workmanship and sleek, classic design, the delicate lamp offers a particularly wide range of applications. The splash-proof mounted lamp with external control gear is also suitable for use in wet locations. A perforated metal diffuser that clips on is an optional accessory for perfect anti-glare.; Color: natural anodised; Optics: acrylic glass diffuser opal; Light control: DALI/TouchDIM; Watt: 23W; Kelvin: 4000K; Lumen: 2730lm/lamp; Materialisation: aluminium; Control gear: control gear 230 V/50 Hz; CRI: >90; Protection class: I; Protection level: IP 20; UGR: 25; Weight (incl. packaging): 1,4kg; Length: 1200mm; Dimension: 1200 x 28 x 32mm

### Drawings

Art. No.: 4131.120.40.0 DIG

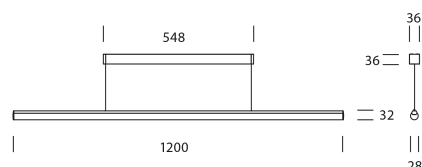

**Light distribution**



C90/C270 —  
C0/C180 ■ cd/1000 lm

**Specifications**

