

SPINAled with acrylic glass diffuser Pendant lamps



Product description

Art. No.: 4014.120.27.0 DIG

Product name: SPINAled pendant lamp

Housing colour: natural anodised

Material: Extruded aluminium mat anodised, with passive cooling

Equipment: For mounting on the ceiling, 2 nickel-plated steel-cable suspensions, length 2500 mm, continuously adjustable height, 2 cable holders, transparent cable 2 x 0.35 mm²

Dimensions (mm): 1200 x 20 x 30

Optics/light technology: acrylic glass diffuser opal

Function: transparent round cable 2 x 0.35 mm², infinite height settings, length 2500mm

Weight (kg): 2.10

Protection level: IP 20

Protection class: I

Control gear: PS 230 V/50 Hz (in a separate housing)

Lighting control: DALI/TouchDIM

Light specification/technical data

Lamp: LED

System power (W): 23

Light flux (lm/lamp): 2160

Luminous efficiency (lm/W): 94

Colour temperature (K): 2700

Colour rendering index (CRI): >90

Light distribution: Direct beam

Lifetime: 50'000h L90 B10 (Ta 25° C)


Energy efficiency: D

Colour consistency (MacAdam): 3


Specification text/Description: Article: 4014.120.27.0 DIG; Article name: SPINAled pendant lamp; Description: SPINAled with opal diffuser is pure lighting aesthetics. With its filigree appearance, it is the ideal lamp for universal lighting solutions.; Color: natural anodised; Optics: acrylic glass diffuser opal; Light control: DALI/TouchDIM; Watt: 23W; Kelvin: 2700K; Lumen: 2160lm/lamp; Materialisation: aluminium; transparent round cable 2 x 0.35 mm²; infinite height settings, length 2500mm; Control gear: control gear 230 V/50 Hz; CRI: >90; Protection class: I; Protection level: IP 20; Weight (incl. packaging): 2,1kg; Length: 1200mm; Dimension: 1200 x 20 x 30mm

Drawings

Art. No.: 4014.120.27.0 DIG

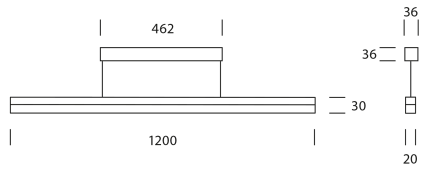

Light distribution



C90/C270 —
C0/C180 ■ cd/1000 lm

Specifications

