

## SPINAled with acrylic glass diffuser Pendant lamps



### Product description

Art. No.: 4014.120.30.0  
 Product name: SPINAled pendant lamp  
 Housing colour: natural anodised  
 Material: Extruded aluminium mat anodised, with passive cooling  
 Equipment: For mounting on the ceiling, 2 nickel-plated steel-cable suspensions, length 2500 mm, continuously adjustable height, 2 cable holders, transparent cable 2 x 0.35 mm<sup>2</sup>  
 Dimensions (mm): 1200 x 20 x 30  
 Optics/light technology: acrylic glass diffuser opal  
 Function: transparent round cable 2 x 0.35 mm<sup>2</sup>, infinite height settings, length 2500mm  
 Weight (kg): 2.10  
 Protection level: IP 20  
 Protection class: I  
 Control gear: PS 230 V/50 Hz (in a separate housing)  
 Lighting control: on/off


### Light specification/technical data

Lamp: LED  
 System power (W): 23  
 Light flux (lm/lamp): 2320  
 Luminous efficiency (lm/W): 101  
 Colour temperature (K): 3000  
 Colour rendering index (CRI): >90  
 Light distribution: Direct beam  
 Lifetime: 50'000h L90 B10 (Ta 25° C)  
 Energy efficiency: D  
 Colour consistency (MacAdam): 3


**Specification text/Description:** Article: 4014.120.30.0; Article name: SPINAled pendant lamp; Description: SPINAled with opal diffuser is pure lighting aesthetics. With its filigree appearance, it is the ideal lamp for universal lighting solutions.; Color: natural anodised; Optics: acrylic glass diffuser opal; Light control: on/off; Watt: 23W; Kelvin: 3000K; Lumen: 2320lm/lamp; Materialisation: aluminium; transparent round cable 2 x 0.35 mm<sup>2</sup>; infinite height settings, length 2500mm; Control gear: control gear 230 V/50 Hz; CRI: >90; Protection class: I; Protection level: IP 20; Weight (incl. packaging): 2,1kg; Length: 1200mm; Dimension: 1200 x 20 x 30mm

### Drawings

Art. No.: 4014.120.30.0

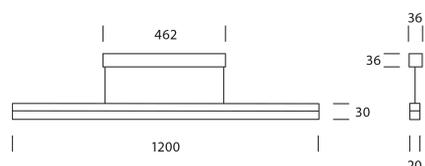

**Light distribution**



**Specifications**

