
RIBAG

SPINAled with acrylic glass diffuser Pendant lamps

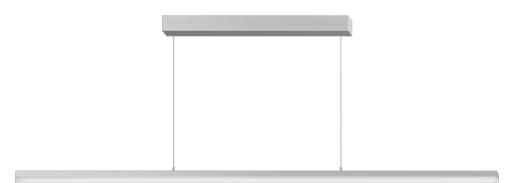

Product description

Art. No.: 4014.120.40.0 DIG Product name: SPINAled pendant lamp Housing colour: natural anodised Material: Extruded aluminium mat anodised, with passive cooling Equipment: For mounting on the ceiling, 2 nickel-plated steelcable suspensions, length 2500 mm, continuously adjustable height, 2 cable holders, transparent cable 2 x 0.35 mm² Dimensions (mm): 1200 x 20 x 30 Optics/light technology: acrylic glass diffuser opal Function: transparent round cable 2 x 0.35 mm2,, infinite height settings, length 2500mm Weight (kg): 2.10 Protection level: IP 20 Protection class: I Control gear: PS 230 V/50 Hz (in a separate housing) Lighting control: DALI/TouchDIM

Light specification/technical data


Lamp: LED System power (W): 23 Light flux (lm/lamp): 2400 Luminous efficiency (lm/W): 104 Colour temperature (K): 4000 Colour rendering index (CRI): >90 Light distribution: Direct beam Lifetime: 50'000h L90 B10 (Ta 25° C) Energy efficiency: D Colour consistency (MacAdam): 3

Specification text/Description: Article: 4014.120.40.0 DIG; Article name: SPINAled pendant lamp; Description: SPINAled with opal diffuser is pure lighting aesthetics. With its filigree appearance, it is the ideal lamp for universal lighting solutions.; Color: natural anodised; Optics: acrylic glass diffuser opal; Light control: DALI/TouchDIM; Watt: 23W; Kelvin: 4000K; Lumen: 2400lm/lamp; Materialisation: aluminium; transparent round cable 2 x 0.35 mm2,; infinite height settings, length 2500mm; Control gear: control gear 230 V/50 Hz; CRI: >90; Protection class: I; Protection level: IP 20; Weight (incl. packaging): 2,1kg; Lenght: 1200mm; Dimension: 1200 x 20 x 30mm

Drawings Art. No.: 4014.120.40.0 DIG



Light distribution



Specifications

