

SPINAled with acrylic glass diffuser Pendant lamps



Product description

Art. No.: 4014.150.40.0 DIG
 Product name: SPINAled pendant lamp
 Housing colour: natural anodised
 Material: Extruded aluminium mat anodised, with passive cooling
 Equipment: For mounting on the ceiling, 2 nickel-plated steel-cable suspensions, length 2500 mm, continuously adjustable height, 2 cable holders, transparent cable 2 x 0.35 mm²
 Dimensions (mm): 1500 x 20 x 30
 Optics/light technology: acrylic glass diffuser opal
 Function: transparent round cable 2 x 0.35 mm², infinite height settings, length 2500mm
 Weight (kg): 2.46
 Protection level: IP 20
 Protection class: I
 Control gear: PS 230 V/50 Hz (in a separate housing)
 Lighting control: DALI/TouchDIM


Light specification/technical data

Lamp: LED
 System power (W): 29
 Light flux (lm/lamp): 3000
 Luminous efficiency (lm/W): 103
 Colour temperature (K): 4000
 Colour rendering index (CRI): >90
 Light distribution: Direct beam
 Lifetime: 50'000h L90 B10 (Ta 25° C)
 Energy efficiency: D
 Colour consistency (MacAdam): 3


Specification text/Description: Article: 4014.150.40.0 DIG; Article name: SPINAled pendant lamp; Description: SPINAled with opal diffuser is pure lighting aesthetics. With its filigree appearance, it is the ideal lamp for universal lighting solutions.; Color: natural anodised; Optics: acrylic glass diffuser opal; Light control: DALI/TouchDIM; Watt: 29W; Kelvin: 4000K; Lumen: 3000lm/lamp; Materialisation: aluminium; transparent round cable 2 x 0.35 mm²; infinite height settings, length 2500mm; Control gear: control gear 230 V/50 Hz; CRI: >90; Protection class: I; Protection level: IP 20; Weight (incl. packaging): 2,46kg; Length: 1500mm; Dimension: 1500 x 20 x 30mm

Drawings

Art. No.: 4014.150.40.0 DIG

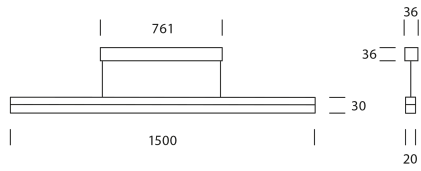

Light distribution



C90/C270 —
C0/C180 ■ cd / 1000 lm

Specifications

