


gic

instructions for use

1. Push main cable through cable entry part of the wall bracket and ensure tight seal.
2. Attach wall bracket. Pay attention of position „TOP“. Use the washer gaskets with rubberized face against to the wall bracket. Seal unused mounting holes (picture 1).
3. Establish ground connection and connect power lines.
4. Hook light housing into notch of the wall bracket. Press luminaire to the wall bracket and tight set screws flush and evenly. Avoid pinched cables.
5. Position the required accessory **gic cover** as a back panel as follows: first insert the gic cover into the lower V-groove of the luminaire body (1.) and press it flush at the top (2.) (picture 2).

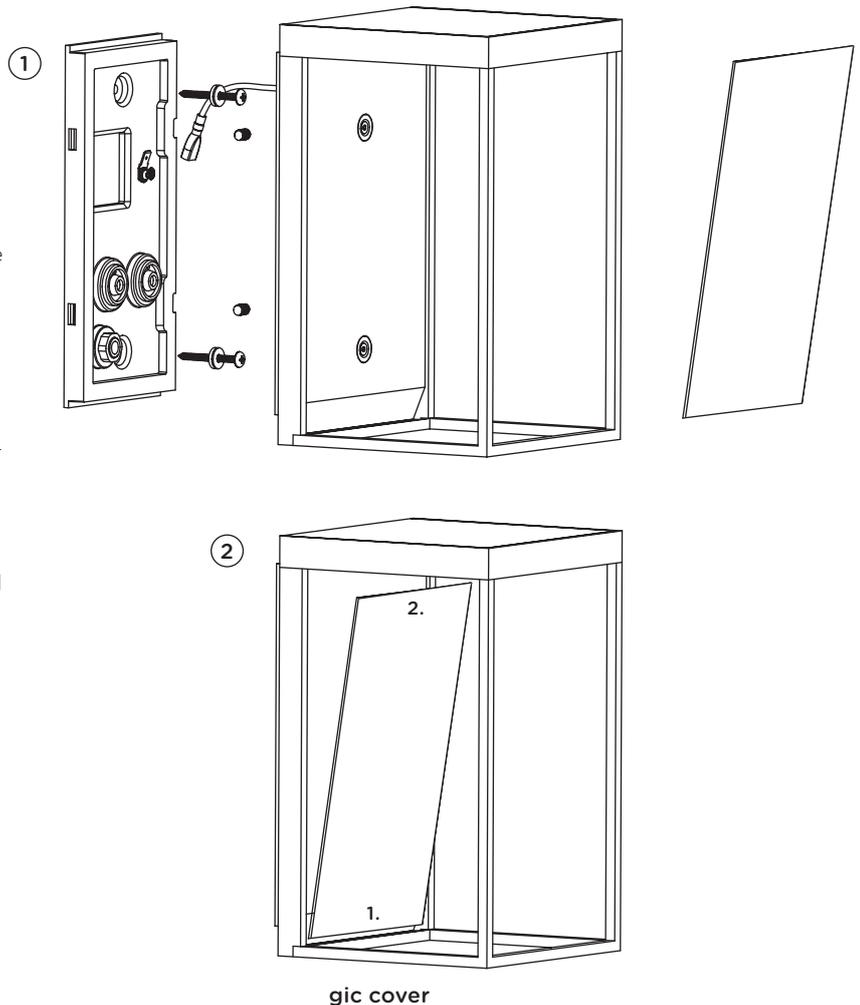

light technology:

230V Power LED / 2700K
system performance: 8 W/360 lm



technical information:

operating voltage 230V / 50Hz



protection class



safety class 1




Luminaire is suitable for mounting on normal inflammable surfaces.



conformity mark

maintenance:



Disconnect the electrical installation.

This luminaire contains built-in LED lamps. The LED lamps can be replaced by IP44.DE in case of a failure of the LED. In this case, please get in touch with your retailer.

dimming:

The luminaire can be dimmed with an approved leading- or trailing edge dimmer. You can request the list of approved dimmers from IP44.DE.

care:

Regularly clean luminaire from dirt and deposits. Do not use a high pressure cleaner for cleaning. Please note care instructions at www.IP44.de.

safety:

We point out that the electric connection of light fixtures has to be done by a certified installer. We assume no accountability for damages which are a result of non-appropriate mounting or application of the luminaire. Modifications on the luminaire will result in loss of warranty.