

FLOS

FA54000133.A Anthracite

Kirk 1 NEW


Designed by FLOS Outdoor



LED source included. LED module configured to work directly on the mains 220-230V ON/OFF. Fixing bracket included. IP68 connector for 6mm$\phi$$\times$8mm rubber cable. To ensure the tightness of the cable guide it's recommended to use flexible electric cables suitable for exterior use. Ground spike to be ordered separately.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

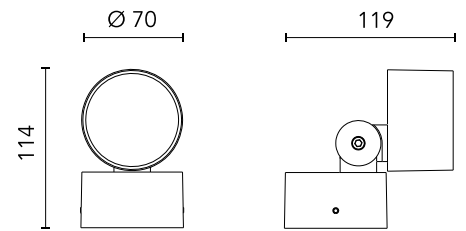

Main specifications

| | |
|------------------|-----------------------|
| Mounting | Ceiling, Wall, Ground |
| Environments | Outdoor wet location |
| LED type | LED array |
| Number of heads | 1 |
| Power (W) | 4.5 |
| System power (W) | 6 |
| Source flux (lm) | 387 |
| System flux (lm) | 270 |

Physical

| | |
|--------------------------|------------|
| Colour | Anthracite |
| Orientation | Adjustable |
| Longitudinal tilting (°) | 135 |
| IP internal | 65 |

Download

Mounting instructions [↓ ZIP](#)


Photometric Files

LDT / IES [↓ ZIP](#)


Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)




Ecodesign and Energy Labelling



Non-replaceable light source

Schematic light drawing



Photometric

| | |
|------------------------|-----------|
| Lighting type | Direct |
| Light distribution | Symmetric |
| CCT (K) | 3000 |
| CRI> | 80 |
| Beam angle C0-180 (°) | 49 |
| Beam angle C90-270 (°) | 49 |


Electrical

| | |
|--------------------|--------------|
| Insulation class | I |
| Frequency (Hz) | 50-60 |
| Main voltage (Vac) | 220-230 |
| Dimmable | No |
| Dimming type | Non Dimmable |
| Emergency type | No |

Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

Accessories & Power Supply



OPTIONAL
Accessory

F990E00A000

S.P.D. (SURGE PROTECTION
DEVICE)



OPTIONAL
Accessory

FA264

Ground Spike Kirk 1