

# FLOS

FA54000333 Anthracite

## Kirk 3 NEW


Designed by FLOS Outdoor



LED source included. LED module configured to work directly on the mains 220-230V ON/OFF. Fixing bracket included. IP68 connector for 6mm<math>\phi</math><math>\times</math>8mm rubber cable. To ensure the tightness of the cable guide it's recommended to use flexible electric cables suitable for exterior use. Ground spike to be ordered separately.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

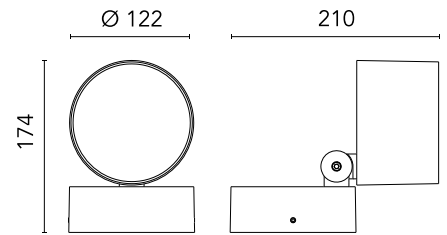

### Main specifications

Mounting	Ceiling, Wall, Ground
Environments	Outdoor wet location
LED type	LED array
Number of heads	1
Power (W)	22
System power (W)	24
Source flux (lm)	2303
System flux (lm)	1610

### Physical

Colour	Anthracite
Orientation	Adjustable
Longitudinal tilting (°)	135
IP internal	65

### Download

Mounting instructions [↓ ZIP](#)


### Photometric Files

LDT / IES [↓ ZIP](#)


### Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)




### Ecodesign and Energy Labelling



Non-replaceable light source

## Schematic light drawing



### Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	80
Beam angle C0-180 (°)	40
Beam angle C90-270 (°)	40


### Electrical

Insulation class	I
Frequency (Hz)	50-60
Main voltage (Vac)	220-230
Dimmable	No
Dimming type	Non Dimmable
Emergency type	No

### Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

## Accessories & Power Supply



OPTIONAL  
Accessory

F990E00A000

S.P.D. (SURGE PROTECTION  
DEVICE)



OPTIONAL  
Accessory

FA268

Ground Spike Kirk 3