



INSTALLATION GUIDE →





LIGHT-POINT

WE BELIEVE IN CREATING LIGHT

At LIGHT-POINT we have one goal - to improve the everyday **life** of people all over the world. Our lamps are designed to provide inspiration, and to solve everyday needs, be it lighting your home **interior**, your office or public spaces. Our **design** is not driven by current trends, since we believe that a classic, minimalistic design with the right function will last for generations and bring **character** into any **environment**.

FOCUS MINI

Design: Ronni Gol



FOUNDER →

Ronni Gol had a decisive influence on how we experience the world around us and interact with one another. We are fortunate enough to live in a world, where we as consumers can choose to switch between night and day according to our whims. In short, we can construct the exact life suiting our individuality, because we are not dependent on daylight to be able to function, and can for instance choose to work at night and sleep during the day. This places great demands on how we approach future light solutions, and the possibilities for innovation when developing a lighting product.







FOCUS

Art. name	Focus Mini 1	Focus Mini 2	Focus Mini 3	Focus Mini 4
Art. no. white	261600	261606	261612	261618
Art no. black	261601	261607	261613	261619
EAN white	5711389616007	5711389286064	5711389616120	5711389616182
EAN black	5711389516017	5711389616076	5711389616137	5711389616199
RAL white	9003	9003	9003	9003
RAL black	9005	9005	9005	9005
Material	Aluminium/Glass	Aluminium/Glass	Aluminium/Glass	Aluminium/Glass



ENERGY LABEL

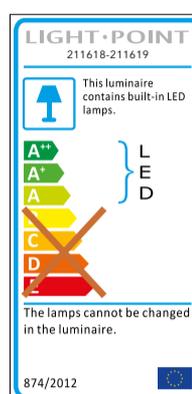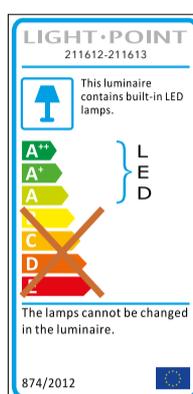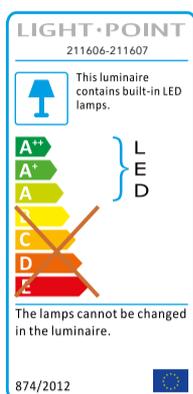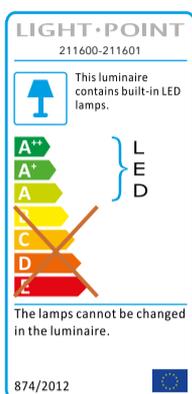

DIMMING



Art. name	Focus Mini 1	Focus Mini 2	Focus Mini 3	Focus Mini 4
Light source	Lumens	Lumens	Lumens	Lumens
Lifetime	50.000	50.000	50.000	50.000
Number of light	1	2	3	4
Electronic gear	N/A	N/A	N/A	N/A
Driver watt	N/A	N/A	N/A	N/A
Light source watt	4	4	4	4
System watt	4	8	12	16
Voltage	220-240	220-240	220-240	220-240
Dimmable	Yes	Yes	Yes	Yes
Lumen output	360	720	1080	1440
Lumen pr. watt	90	90	90	90
Flux	292	584	876	1168
CCT (K)	3000	3000	3000	3000
RA/CRI	≥ 90	≥ 90	≥ 90	≥ 90
Mac Adam	3	3	3	3
Light Distribution	Direct	Direct	Direct	Direct
Beaming angle	26	26	26	26
Tilt angle	90	90	90	90
Cut out mm.	N/A	N/A	N/A	N/A
Rotation	N/A	N/A	N/A	N/A
Looping	N/A	N/A	N/A	N/A

INSTALLATION GUIDE



INSTALLATION INSTRUCTION

- Before installing, make sure the power supply is switched off.
- Follow the steps as the figure for installation or replacement of bulb Step.
 - after holing, pull out the wires.
 - fix the mounting bracket onto the wall with screws.
 - connect the wires to the terminal block.
 - slide the fixture to the mounting bracket
- After finishing every step, tighten the screws, have the fixture fixed, and then connect the power supply.

CLEANING INSTRUCTION

- Before cleaning, ensure that the power supply is switched off.
- Use only a soft cloth to clean the lamp, dampened with mild cleanser if needed for resistant dirt.
- Warning: do not use alcohol or other solvents.

CAUTION:

In case of any doubt, please contact the qualified electrician.

MOUNTING

