

BEGA**22 399**

Wall luminaire



Project · Reference number

Date

Product data sheet

Application

Wall luminaire with shielded light source.
A luminaire of high protection class and with two-sided light output.
For a variety of lighting tasks in interior and exterior lighting applications.

Product description

Luminaire made of aluminium alloy,
aluminium and stainless steel
BEGA Unidure® coating technology
Matt safety glass
Silicone gasket
2 mounting holes \varnothing 5 mm
Distance apart 274 mm
2 cable entries for through-wiring of mains
supply cable \varnothing 7-10.5 mm
Connection terminal 2.5²
Earth conductor connection
Lampholder E 27
Safety class I
Protection class IP 65
Dust-tight and protection against water jets
Impact strength IK06
Protection against mechanical
impacts < 1 joule
 – Safety mark
CE – Conformity mark
Weight: 1.9 kg

Lamps

Luminaire with screw base E 27
Lamp output max. 2 × 40 W
This product contains light sources of energy
efficiency class E

Supplied lamp


2 × BEGA LED lamp **13584**
LED Retrofit 7 W · 1610 lm · 3000 K

Luminaire efficiency: 20%

Additional BEGA LED lamps are available for
this luminaire:

13586 LED 7 W · 805 lm · 3000 K
dimmmable

Detailed technical and lighting data for the
lamps can be found in the data sheets on our
website.

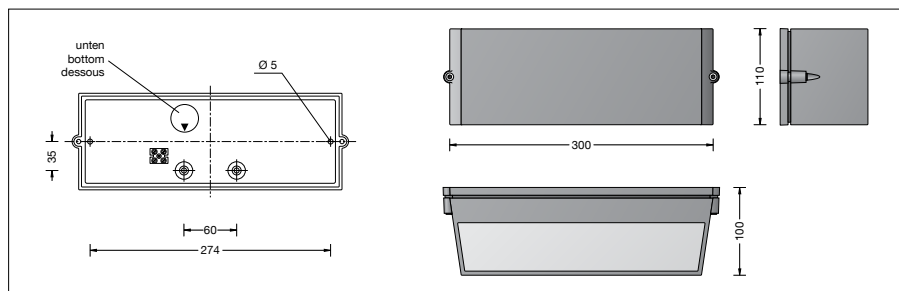

Lighting technology

Luminaire data for the DIALux lighting design
program for outdoor lighting, street lighting
and indoor lighting, as well as luminaire data in
EULUMDAT and IES format are available on the
BEGA website at www.bega.com.

Ratio of luminous flux

Luminous flux upper half-space	50,2 %
Luminous flux lower half-space	49,8 %

BUG rating according to IES TM-15-07:
0-2-0

CEN Flux Code according to EN 13032-2:
66-90-99-50-20-61-87-98-50

Article No. 22399

Colour optionally graphite, white or silver
Graphite – Article number
White – Article number + **W**
Silver – Article number + **A**

Light distribution

