


TETRIX Straight 62 LED GE

135110XX_135111XX_135112XX_135113XX_135114XX_135115XX

TETRIX Straight 62

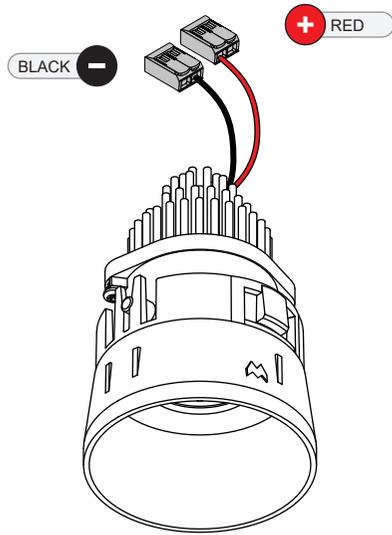

ELECTRICAL SPECS LED-FIXTURE

Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	13,2	15,0	5,0
500	13,7	15,4	7,2

⊕ RED ⊖ BLACK

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.



LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



PREVENTING ELECTROSTATIC DAMAGE


A discharge of static electricity may damage sensitive components. Always be properly grounded when touching leads or circuitry inside the luminaire. Use a wrist strap connected by a ground cord to the housing. Avoid touching the light sources with bare hands.

DRIVERS & ACCESSORIES


For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

SHOULD BE USED WITH

TETRIX frame round 74
135100XX



TRIMLESS RING Ø62
13515430

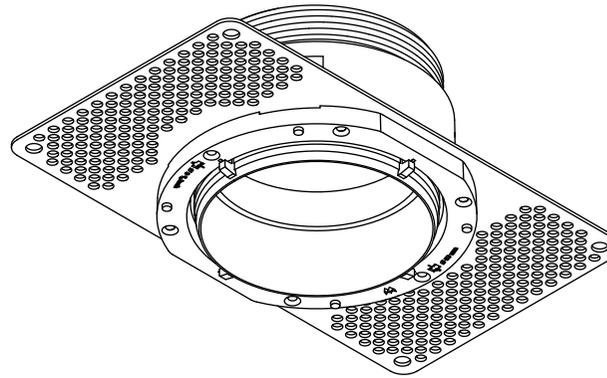

OPTICAL ACCESSORIES

HONEYCOMB Ø33
13515132



SNOOT Ø32
13515032



LC Ø44
13515232



LC Ø64
13515332

