

**BEGA****33 335**

Wall luminaire



Project · Reference number

Date

## Product data sheet

### Application

Wall luminaire with light emission on two sides.  
Fully glare-free light for illuminating wall surfaces  
and roadways adjacent to the walls. For interior  
and exterior lighting design.

### Product description

Luminaire made of aluminium alloy  
and stainless steel  
BEGA Unidure® coating technology  
Crystal glass coated  
Silicone gasket  
2 mounting holes  $\varnothing$  5.5 mm  
Distance apart 75 mm  
2 cable entries for through-wiring of mains  
supply cable  $\varnothing$  7-10.5 mm  
Lampholder terminal 2.5<sup>□</sup>  
Earth conductor connection  
Lampholder E 27  
Safety class I  
Protection class IP 65  
Dust-tight and protection against water jets  
Impact strength IK07  
Protection against mechanical  
impacts < 2 joule  
 – Safety mark  
 – Conformity mark  
Weight: 2.0 kg

### Lamp

Luminaire with screw base E 27  
Lamp output max. 60 W  
This product contains light source of energy  
efficiency class E

### Supplied lamp

BEGA LED lamp **13584**  
LED Retrofit 7 W · 805 lm · 3000 K

Luminaire efficiency: 39%


Additional BEGA LED lamps are available for  
this luminaire:

- 13586** LED 7 W · 805 lm · 3000 K  
dimmable
- 13588** LED 8 W · 1055 lm · 3000 K
- 13590** LED 12 W · 1400 lm · 3000 K
- 13592** LED 12 W · 1400 lm · 3000 K  
dimmable

Radio-controlled version (Zigbee 3.0):

- 13555** LED 9 W · 805 lm · 2700 K  
dimmable
- 13556** LED 9 W · 805 lm · 2700-6500 K  
dimmable · tunable white
- 13557** LED 9.5 W · 805 lm · 2700-6500 K  
dimmable · tunable white · RGBW

Detailed technical and lighting data for the  
lamps can be found in the data sheets on our  
website.

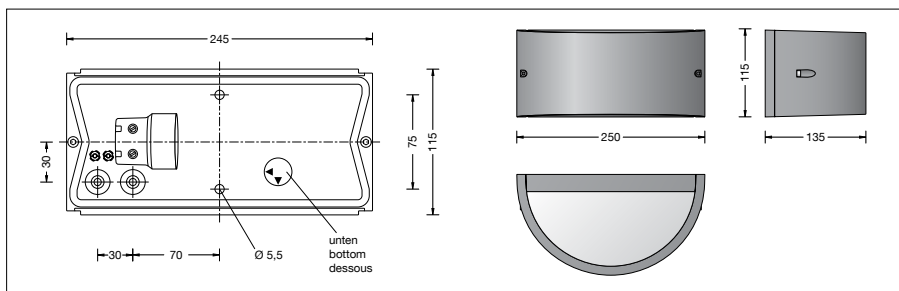

### Lighting technology

Luminaire data for the DIALux lighting design  
program for outdoor lighting, street lighting  
and indoor lighting, as well as luminaire data in  
EULUMDAT and IES format are available on the  
BEGA website at [www.bega.com](http://www.bega.com).

### Ratio of luminous flux

Luminous flux upper half-space 50 %  
Luminous flux lower half-space 50 %

BUG rating according to IES TM-15-07:  
0-3-0  
CEN Flux Code according to EN 13032-2:  
50-82-97-50-39-50-82-97-50

### Article No. 33335

Colour graphite or silver  
graphite – article number  
silver – article number + A

### Light distribution

