



name	GREG			
ref	186024	GREG SQUARE	TEXT. GREY	2700K
	186083	GREG SQUARE	SILVER ANTHR.	2700K
	186086	GREG SQUARE	TEXT. BLACK	2700K
	186089	GREG SQUARE	SILVER SAND	2700K
	186034	GREG SQUARE	TEXT. GREY	3000K
	186093	GREG SQUARE	SILVER ANTHR.	3000K
	186096	GREG SQUARE	TEXT. BLACK	3000K
	186099	GREG SQUARE	SILVER SAND	3000K
	186053	GREG SQUARE	SILVER ANTHR.	6250K
	186056	GREG SQUARE	TEXT. BLACK	6250K
	186059	GREG SQUARE	SILVER SAND	6250K
	186033	GREG SQUARE	SILVER ANTHR.	AMBER
	186039	GREG SQUARE	SILVER SAND	AMBER
	186224	GREG INDY	TEXT. GREY	2700K
	186283	GREG INDY	SILVER ANTHR.	2700K
	186286	GREG INDY	TEXT. BLACK	2700K
	186289	GREG INDY	SILVER SAND	2700K
	186234	GREG INDY	TEXT. GREY	3000K
	186293	GREG INDY	SILVER ANTHR.	3000K
186296	GREG INDY	TEXT. BLACK	3000K	
186299	GREG INDY	SILVER SAND	3000K	
186253	GREG INDY	SILVER ANTHR.	6250K	
186256	GREG INDY	TEXT. BLACK	6250K	
186259	GREG INDY	SILVER SAND	6250K	
186233	GREG INDY	SILVER ANTHR.	AMBER	
186239	GREG INDY	SILVER SAND	AMBER	
186124	GREG LOUVRE	TEXT. GREY	2700K	
186183	GREG LOUVRE	SILVER ANTHR.	2700K	
186186	GREG LOUVRE	TEXT. BLACK	2700K	
186189	GREG LOUVRE	SILVER SAND	2700K	
186134	GREG LOUVRE	TEXT. GREY	3000K	
186193	GREG LOUVRE	SILVER ANTHR.	3000K	
186196	GREG LOUVRE	TEXT. BLACK	3000K	
186199	GREG LOUVRE	SILVER SAND	3000K	
186153	GREG LOUVRE	SILVER ANTHR.	6250K	
186156	GREG LOUVRE	TEXT. BLACK	6250K	
186159	GREG LOUVRE	SILVER SAND	6250K	
186133	GREG LOUVRE	SILVER ANTHR.	AMBER	
186139	GREG LOUVRE	SILVER SAND	AMBER	
safe distance to object	☹ - 0,1m - ☹			
lamptype	PowerLED 1.2W			
fitting	NONE			
watt	1.2W			
current	230V AC			
symbol	⚡			
gear	Converter incorporated			
ip/class	IP65			
application	Exterior - Interior			
orientability	Wall mounted			
dimmability	Not dimmable			
weight	0,8			

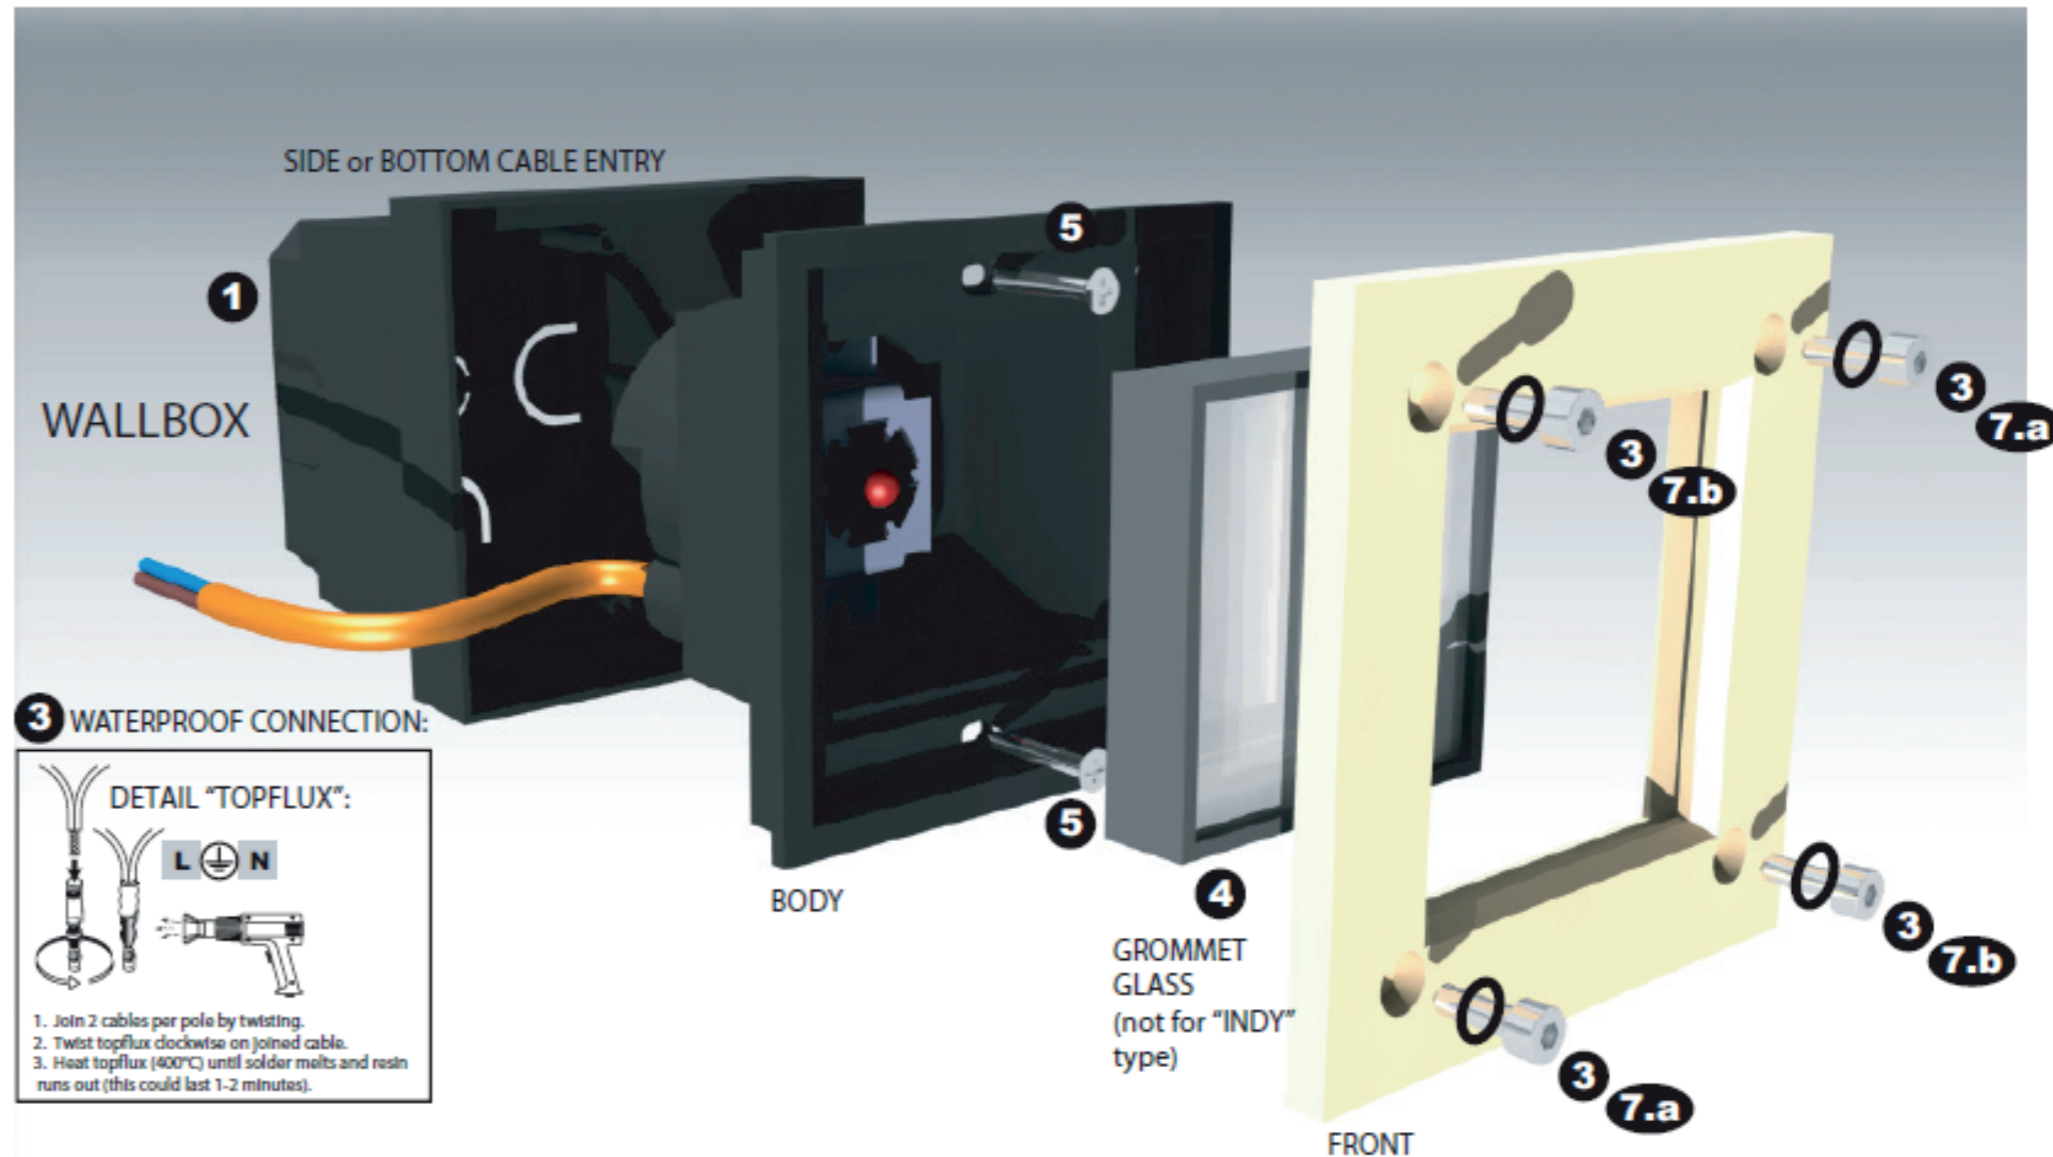

Mounting instructions:

- install included wallbox (hole: 93x93 depth 90mm)
+break cable side or bottom cable entry of wallbox to guide mains powersupply into wallbox
Installation of wallbox can be done by glueing, plastering or cementing.
- connect GREG's cable to mains power supply using 3x topflux (see topflux note)
- unscrew front (4screws) of GREG
- pull out front, gomet (and glass)
- fix GREG body onto wallbox using 2 included screws
- switch mains powersupply "ON" and leave illuminated for 10minutes to heat up the components.
- switch mains powersupply "OFF" and reinstall front, gomet (and glass) by screwing opposite corners first to assure watertightness of luminaire.
(Switch mains power supply back "ON")

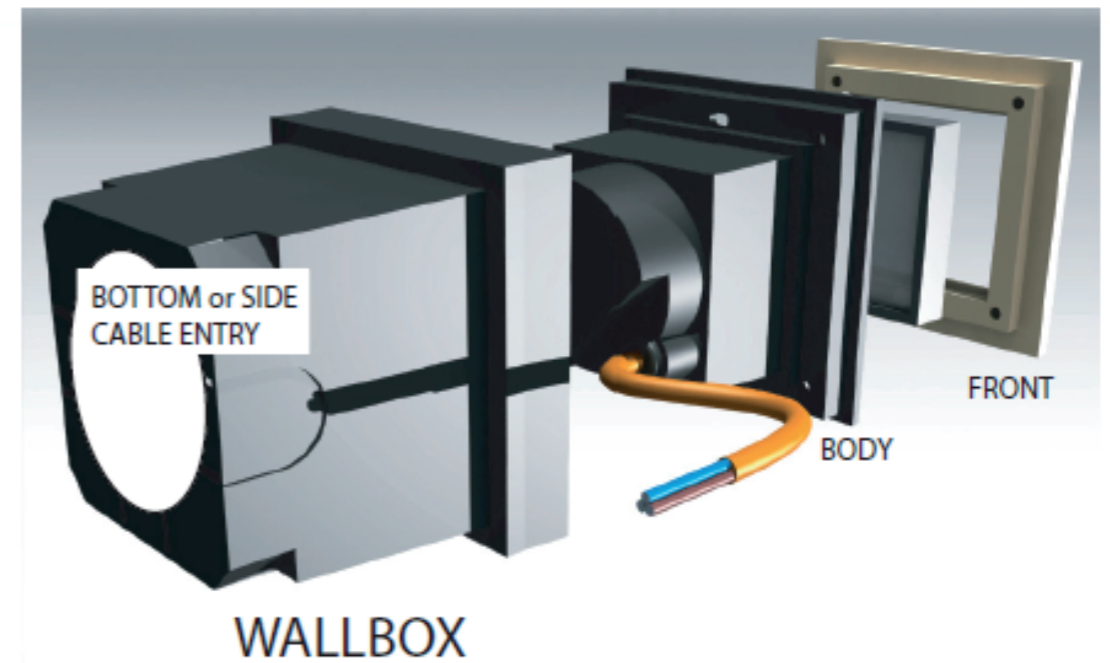

ALWAYS DISCONNECT MAINS POWER SUPPLY FROM CONVERTER BEFORE SWITCHING "ON" LED LUMINAIRES TO PREVENT HOT PLUGGING ISSUES

INSTALLATION AND MAINTENANCE INSTRUCTIONS IN VIEW OF THE MANUFACTURER'S GUARANTEE.
1. THE CONNECTION AND TESTING OF THE DEVICES SHOULD ALWAYS BE PERFORMED BY A RECOGNIZED ELECTRICIAN.
2. THESE LIGHTING DEVICES NEED TO BE INSTALLED, CONNECTED AND TESTED FOLLOWING THE OFFICIAL NATIONAL INSTRUCTION GUIDE FOR ELECTRICAL INSTALLATIONS (BELGIUM, A.R.E.I., GERMANY: DIN VDE 0100 TEIL 559 A2, ...; THIS ENUMERATION IS JUST AN INDICATION)
3. THIS TECHNICAL ENCLOSURE NEEDS TO BE ADDED TO THE GENERAL SALES CONDITION OF THE TAL N.V.
4. THE ELECTRO TECHNICIAN IS RESPONSABLE TO USE BALLASTS, TRANSFORMERS,...WHICH MEET THE VALID CE AND EMC RULES.
5. ALWAYS REPLACE THE LAMP (-S) WITH UTMOST CAUTIOUSNESS, THE LAMP (-S) IS (ARE) VERY FRAGILE.
6. ATTENTION: NEVER REPLACE THE LAMP WITH BARE HANDS, ALWAYS USE A CLOTH !