



**Ø70**

TOBY.ES50/..  
downlight



### Light distribution

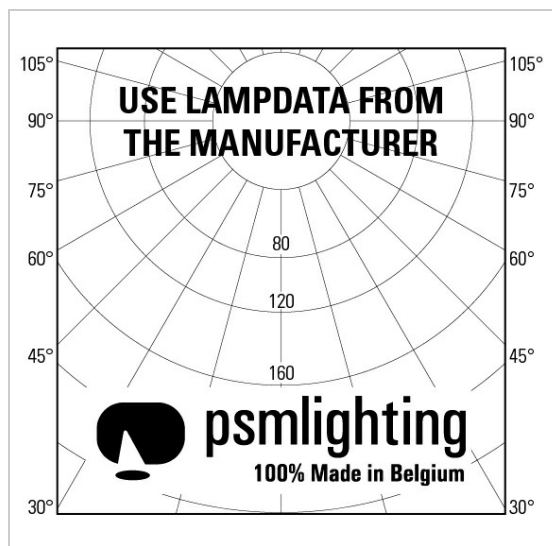

Project \_\_\_\_\_  
Type \_\_\_\_\_  
Nota \_\_\_\_\_  
Quantity \_\_\_\_\_  
Date \_\_\_\_\_

### Lamp

(Bulb not included)

Lamp type	QPAR 51
Lamp base	GU10
Quantity	1
Power	20W
Voltage	230V

### Physical

Use type	Interior
Fixation type	Ceiling
Type of opening	Round
Aperture dimensions	Ø70 mm
Installation depth	95 mm
Dimensions fixture	ø80x85 mm
Spring type	S2 - flat springs
IP protection rating	IP20
Weight	0,3600 kg

### Electrical

Connection voltage	~230V
Fixture class	I
Light source replaceability	Replaceable light source by an end-user

Project \_\_\_\_\_

Type \_\_\_\_\_

Nota \_\_\_\_\_










Quantity \_\_\_\_\_

Date \_\_\_\_\_

## Ø70

TOBY.ES50/..  
downlight

### Colours

	1	white gloss	TOBY.ES50.1
	11	alu grey	TOBY.ES50.11
	13	bronze	TOBY.ES50.13
	14	alu satin	TOBY.ES50.14
	16	satin gold	TOBY.ES50.16
	1M	white texture	TOBY.ES50.1M
	2	black matt	TOBY.ES50.2
	21	rust	TOBY.ES50.21
	23	dark bronze	TOBY.ES50.23
	2M	black tex	TOBY.ES50.2M
	4	shiny gold	TOBY.ES50.4
	45	sun gold	TOBY.ES50.45

### Options

S6.70/..	plasterkit	PLASTERKIT
S1/..	supplement - set torsion springs	SET TORSION SPRINGS