



TRAIN NARROW

INSTALLATION INSTRUCTIONS | DECEMBER 2022


1.0

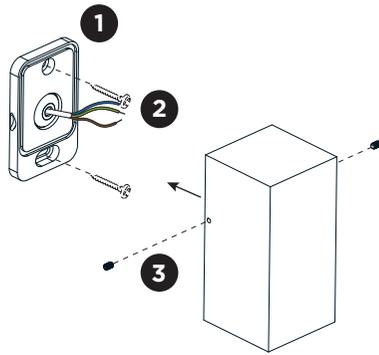

2.0

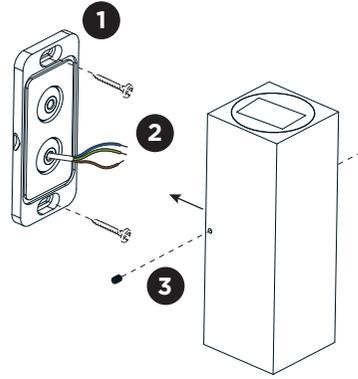

DIMENSIONS




1.0 NARROW

2.0 NARROW


MOUNTING INSTRUCTION

- 1 Remove the mounting base from the luminaire by loosening the side screws and mount it on the wall with screws (screws are not included).
- 2 POWER CONNECTION
Connect to 220-240V.



Please use a matching grommet based on the used 220-240V cable and the corresponding type in the overview table.


for example:



Push the grommet into the back plate. Pull the cable through the back plate. Mount the back plate on the wall.

- 3 Fix the luminaire on the base with the side screws.

Mounting base:

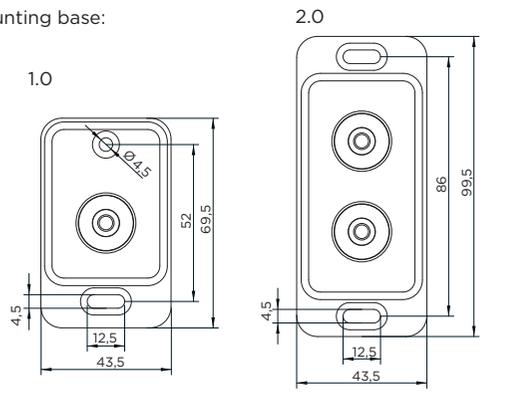


	A	B	C
use pin to make hole, not a knife			
CABLE			
TYPE	ROUND H05RN-F H07RN8-F H07RN-F	ROUND H05RN-F	ROUND
OUTSIDE Ø	min 6.8mm max 8.9mm	min 5mm max 6.8mm	min 1.5mm max 2.6mm
CONDUCTION SECTION	2or3x 0.75mm ² 2or3x 1.0mm ² 2or3x 1.5mm ²	2or3x 0.75mm ² 2x 1.0mm ²	0.75mm ² 1.5mm ²


TRAIN NARROW

INSTALLATION INSTRUCTIONS | DECEMBER 2022

1.0

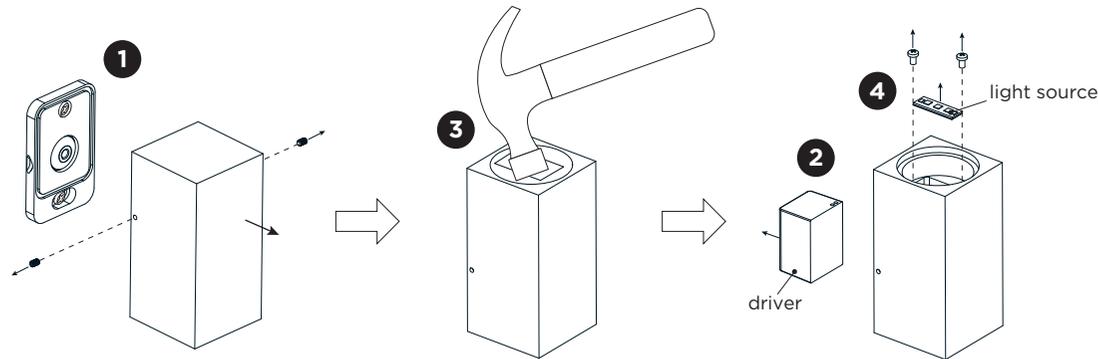

2.0

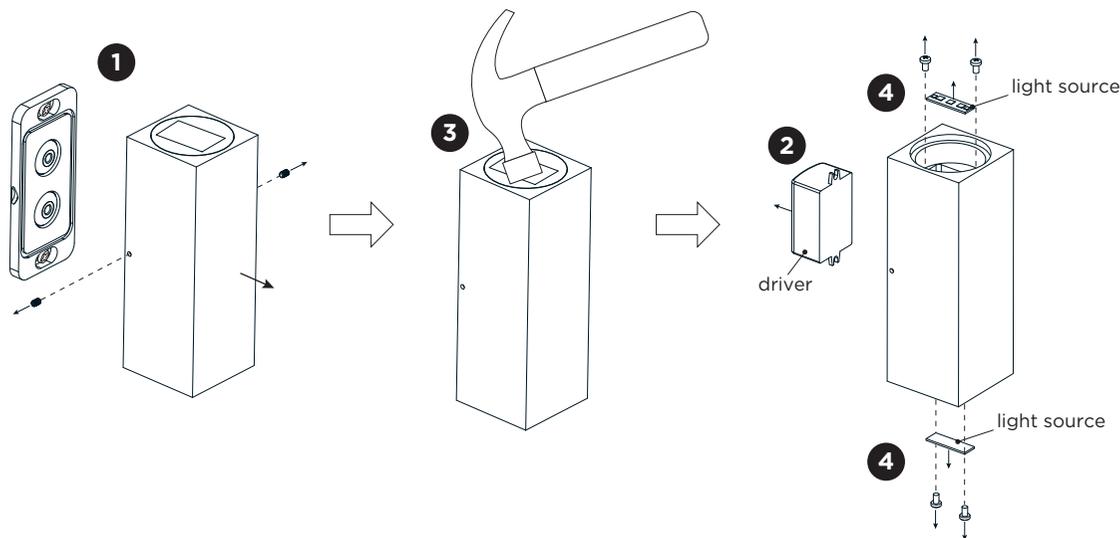


DISMOUNTING AND RECYCLING INSTRUCTIONS

Light source & driver

- 1 Loosen the side screws, disconnect wires and remove the fixture from the mounting base.
- 2 Disconnect the wires and take out the driver.
- 3 Break the glass.
- 4 Remove the screws and take out the light source.



The driver can be replaced by the end user.



The light source is not replaceable.



This luminaire contains a light source with the energy class F.



WEVER & DUCRÉ
LIGHTING

WEVER & DUCRÉ BV
Spinnerijstraat 99/21, 8500 Kortrijk, Belgium
weverducre.com