

# FLOS


FA1052541218 Deep Brown

## Aimer 4 Constant Voltage NEW

Designed by FLOS Outdoor



LED source included. Remote electrical power supply 24V dc ON/OFF to be ordered separately. Parallel connection. Equipped with a 2000 mm protruding section of neoprene cable and a kit with crimpable connectors and adhesive heat-shrinkable sleeves that guarantee the tightness of the connection. Fixing bracket included. Extraclear transparent glass. The metal nail for ground installation needs to be ordered separately.

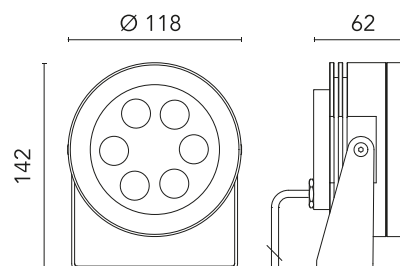

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

Mounting	Ceiling, Wall, Ground
Environments	Outdoor wet location
LED type	Power LED
Number of heads	1
Power (W)	10
System power (W)	10
Source flux (lm)	889
System flux (lm)	570

### Physical

Colour	Deep Brown
Orientation	Directional
Longitudinal tilting (°)	185
IP internal	66/67

### Download

Mounting instructions [↓ ZIP](#)


### Photometric Files

LDT / IES [↓ ZIP](#)

### Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)




### Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only) light source by a professional

## Schematic light drawing



Beam Angle: 8°

h(m)	E(lx)	D(m)
1	14525	0.14
2	3631	0.27
3	1614	0.41
4	908	0.54
5	581	0.68

Luminous flux Luminaire  
570 lm

### Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	4000
CRI>	80
Beam angle C0-180 (°)	8
Beam angle C90-270 (°)	8

### Electrical

Insulation class	III
Main voltage (Vac)	24
Driver	Remote excluded
Dimmable	No
Dimming type	Non Dimmable
Emergency type	No

### Notes

Dimmable version on request

## Accessories & Power Supply



OPTIONAL  
Accessory

F990C00A000

2 way terminal block 4 poles IP68  
H2O stop. (ø5,5÷12mm cable)



OPTIONAL  
Accessory

F990C010000

3/4 way terminal block 4 poles  
IP68 H2O stop. (ø5,5÷12mm  
cable)



OPTIONAL  
Power supply

RF25752

Power supply 24Vdc 20W / 220-  
240V IP67 Class II selv. Non  
Dimmable



OPTIONAL  
Accessory

FA136

Ground Spike Aimer 1/Aimer  
2/Aimer 3/Perseo 2



OPTIONAL  
Power supply

F990B27A000

Power supply 24Vdc 70W / 220-  
240V IP67 Class I selv. Non  
Dimmable



OPTIONAL  
Power supply

F990B28A000

Power supply 24Vdc 50W / 220-  
240V IP67 Class I selv. Non  
Dimmable