

FLOS


FA1052552212 Forest Green

Aimer 4 Constant Voltage NEW

Designed by FLOS Outdoor



LED source included. Remote electrical power supply 24V dc ON/OFF to be ordered separately. Parallel connection. Equipped with a 2000 mm protruding section of neoprene cable and a kit with crimpable connectors and adhesive heat-shrinkable sleeves that guarantee the tightness of the connection. Fixing bracket included. Extraclear transparent glass. The metal nail for ground installation needs to be ordered separately.

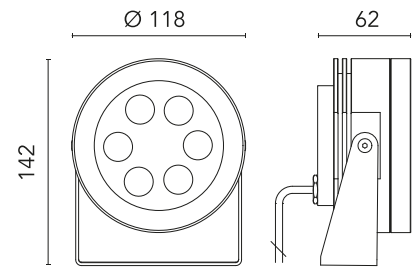

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

| | |
|------------------|-----------------------|
| Mounting | Ceiling, Wall, Ground |
| Environments | Outdoor wet location |
| LED type | Power LED |
| Number of heads | 1 |
| Power (W) | 10 |
| System power (W) | 10 |
| Source flux (lm) | 776 |
| System flux (lm) | 498 |

Physical

| | |
|--------------------------|--------------|
| Colour | Forest Green |
| Orientation | Directional |
| Longitudinal tilting (°) | 185 |
| IP internal | 66/67 |

Download

Mounting instructions [↓ ZIP](#)


Photometric Files

LDT / IES [↓ ZIP](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)




Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only) light source by a professional

Schematic light drawing



| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1 | 12690 | 0.14 |
| 2 | 3172 | 0.27 |
| 3 | 1410 | 0.41 |
| 4 | 793 | 0.54 |
| 5 | 508 | 0.68 |

Photometric

| | |
|------------------------|-----------|
| Lighting type | Direct |
| Light distribution | Symmetric |
| CCT (K) | 2700 |
| CRI> | 80 |
| Beam angle C0-180 (°) | 8 |
| Beam angle C90-270 (°) | 8 |

Electrical

| | |
|--------------------|-----------------|
| Insulation class | III |
| Main voltage (Vac) | 24 |
| Driver | Remote excluded |
| Dimmable | No |
| Dimming type | Non Dimmable |
| Emergency type | No |

Notes

Dimmable version on request

Accessories & Power Supply



OPTIONAL
Accessory

F990C00A000

2 way terminal block 4 poles IP68
H20 stop. (ø5,5÷12mm cable)



OPTIONAL
Accessory

F990C010000

3/4 way terminal block 4 poles
IP68 H20 stop. (ø5,5÷12mm
cable)



OPTIONAL
Power supply

RF25752

Power supply 24Vdc 20W / 220-
240V IP67 Class II selv. Non
Dimmable



OPTIONAL
Accessory

FA136

Ground Spike Aimer 1/Aimer
2/Aimer 3/Perseo 2



OPTIONAL
Power supply

F990B27A000

Power supply 24Vdc 70W / 220-
240V IP67 Class I selv. Non
Dimmable



OPTIONAL
Power supply

F990B28A000

Power supply 24Vdc 50W / 220-
240V IP67 Class I selv. Non
Dimmable