

FLOS

FA1052560012 Forest Green

Aimer 5 Rgb NEW


Designed by FLOS Outdoor



RGB LED source included. Remote electrical power supply with DMX 3chx350mA interface to be ordered separately. Serial connection. Equipped with a 2000 mm protruding section of neoprene cable and a kit with crimpable connectors and adhesive heat-shrinkable sleeves that guarantee the tightness of the connection. Transparent screen-printed glass. The metal nail for ground installation needs to be ordered separately.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

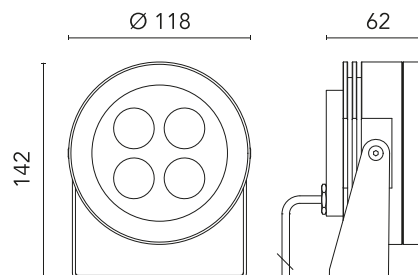

Main specifications

Mounting	Ceiling, Wall, Ground
Environments	Outdoor wet location
LED type	Power LED
Number of heads	1
Power (W)	13.6
System power (W)	13.6

Physical

Colour	Forest Green
Orientation	Directional
Longitudinal tilting (°)	185
IP internal	66/67

Download


[Mounting instructions](#)

[ZIP](#)

Ecodesign and Energy Labelling



Replaceable (LED only)
light source by a
professional



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	RGB

Electrical

Insulation class	III
Main voltage (Vac)	3CHx350MA
Driver	Remote excluded
Dimmable	Yes
Dimming type	Dimmable DMX
Emergency type	No

Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

Accessories & Power Supply



OPTIONAL
Accessory

F990B10A000


DMX controller; dimmer switch
for recessed box (60mm hole
centres)



OPTIONAL
Accessory

F990B11A000

DMX controller; stand-alone/pc
interface.



OPTIONAL
Accessory

F990B13A000

DMX splitter 512



OPTIONAL
Accessory

F990B12A000

DMX cable - shielded twisted pair
with 110 Ohm constant
impedance



OPTIONAL
Power supply

F990B22A000

Power supply with DMX interface
for RGB fixtures 36W/220÷240v-
3CH x 350mA (3CH x 10 x 1W)
DMX control allowed IP67 Class I
Selv Eq.



OPTIONAL
Accessory

FA136

Ground Spike Aimer 1/Aimer
2/Aimer 3/Perseo 2