



WEVER & DUCRÉ
LIGHTING

BLINK TRIMLESS 1.0

721261B5

Project
Type
Notes
Quantity
Date

GENERAL

Floor , Recessed
 Black Matt
 RAL 9005^a
 IP65
 IK08
 Exterior
 Output: 410 lm
 CIE flux code: 96 99 100 100 100

LED

3000 K
 CRI ≥ 90
 L80 / 50000h
 2 SDCM

OPTICAL

Flood , Beam angle 30°

ELECTRICAL

excl. driver
 9 V
 LED Inset 4.2 W
 Class 3
 500 mA



PHYSICAL

Diameter 50 mm
 Height 57 mm
 0.32 kg

CUTOUT

Diameter 50-52 mm
 Recessed depth 110 mm


^a Color may deviate slightly due to production conditions.

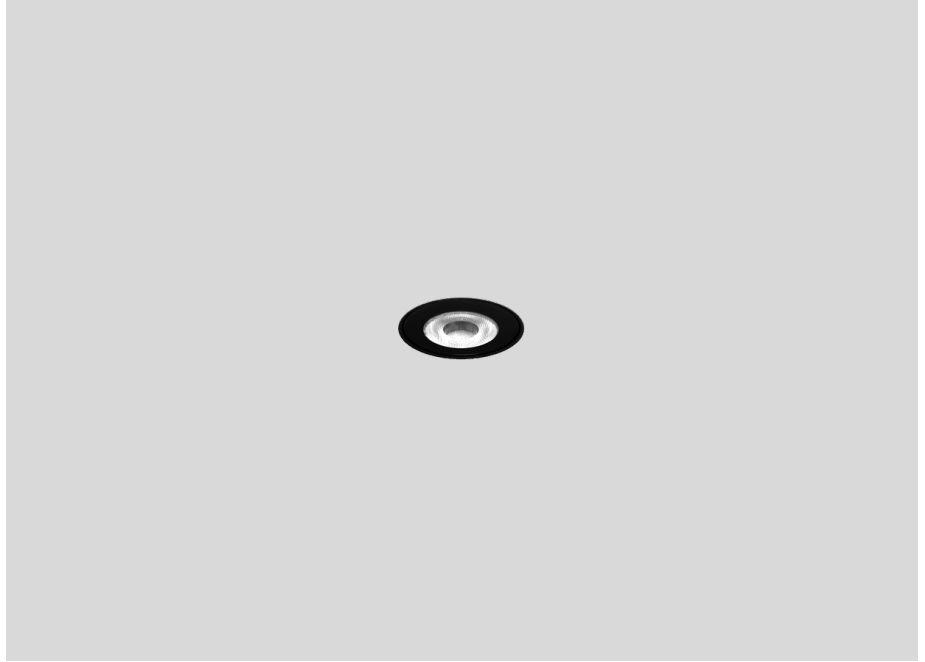

Round floor recessed luminaire made from aluminium and glass; for trimless installation; surface Black Matt; RAL 9005; recessed depth 110 mm; with COB (Chip on Board) technology for maximum efficiency; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; beam angle 30°; degree of protection IP65; PC3; driver not included; optional recessed ground housing available; light source not replaceable;



LIGHT DISTRIBUTION



[721261B5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré apply.
 © Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com



WEVER & DUCRÉ
LIGHTING

BLINK TRIMLESS 1.0

721261B5

CONE DIAGRAM

flood 32°

h (m)	EO° (lx)	ø (m)
1	1080	0.56
2	270	1.13
3	120	1.69
4	70	2.26
5	40	2.82

ELECTRICAL

Driver

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
7W 500mA 5-14,5V IP67	57 · 41 · 24	5-14,5V	9 0 2 1 4 3 0 1
6.5W 500mA 7-13V phase-cut dim	122 · 41 · 23	7-13V	9 0 2 2 4 3 0 1

MOUNTING

Ground Housing

TYPE	Ø · H (MM)	ORDERCODE
MAP 0.6 CHART 0.6 BLINK TRIM TRIM- LESS	ø132 · 105	9 0 0 1 2 2 0 1