

FLOS


FA51305933 Anthracite

Aimer 2 Wall 500 NEW

Designed by FLOS Outdoor



LED source included. Remote electrical power supply 24V dc ON/OFF to be ordered separately. Equipped with a 2000 mm protruding section of neoprene cable and a 2-pole and 3-way connection box with H2O STOP system that guarantee the tightness of the connection. Extraclear transparent glass. Metal nail for ground installation included. Dimmable version available upon request.

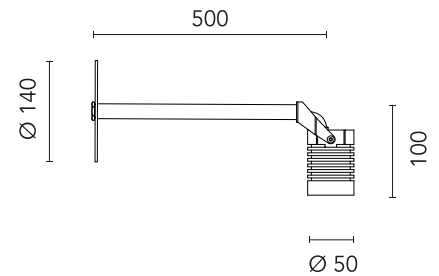

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling, Wall
Environments	Outdoor wet location
LED type	Power LED
Number of heads	1
Power (W)	2.2
System power (W)	3.4
Source flux (lm)	224
System flux (lm)	155

Physical

Colour	Anthracite
Orientation	Directional
Longitudinal tilting (°)	174
IP internal	65

Download

[Mounting instructions](#)  ZIP


Photometric Files

[LDT / IES](#)  ZIP

Technical Drawings

[2D](#)  ZIP


[3D](#)  ZIP



Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F

Schematic light drawing



h(m)	E(lx)	D(m)
1	2218	0.21
2	554	0.43
3	246	0.64
4	139	0.86
5	89	1.07

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	4000
CRI>	80
Beam angle C0-180 (°)	12
Beam angle C90-270 (°)	12

Electrical

Insulation class	III
Main voltage (Vac)	24
Driver	Remote excluded
Dimmable	No
Dimming type	Non Dimmable
Emergency type	No

Notes

Dimmable version on request

Accessories & Power Supply



OPTIONAL Power supply

RF25754

Power supply dual function Vout
24Vdc: 8W/100÷240V Iout
350ma: 6x1W/100÷240V IP20
Class II selv_Non Dimmable



OPTIONAL Power supply

RF25752

Power supply 24Vdc 20W / 220-
240V IP67 Class II selv. Non
Dimmable



OPTIONAL Power supply

RF25748

Power supply dual function Vout
24Vdc: 8W/100÷240V Iout
350ma: 6x1W/100÷240V IP65
Class II selv. Non Dimmable



OPTIONAL Accessory

F990H010000

Recessed 3-module junction box
(model 503)



OPTIONAL Power supply

F990B27A000

Power supply 24Vdc 70W / 220-
240V IP67 Class I selv. Non
Dimmable



OPTIONAL Power supply

F990B28A000

Power supply 24Vdc 50W / 220-
240V IP67 Class I selv. Non
Dimmable