

# FLOS

FA51309630 Black

## Aimer 2 Wall 500 NEW


Designed by FLOS Outdoor



LED source included. Remote electrical power supply 24V dc ON/OFF to be ordered separately. Equipped with a 2000 mm protruding section of neoprene cable and a 2-pole and 3-way connection box with H2O STOP system that guarantee the tightness of the connection. Extraclear transparent glass. Metal nail for ground installation included. Dimmable version available upon request.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

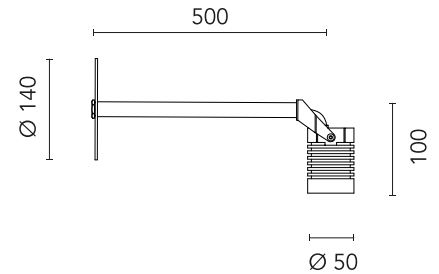

### Main specifications

Mounting	Ceiling, Wall
Environments	Outdoor wet location
LED type	Power LED
Number of heads	1
Power (W)	2.2
System power (W)	3.4
Source flux (lm)	199
System flux (lm)	138

### Physical

Colour	Black
Orientation	Directional
Longitudinal tilting (°)	174
IP internal	65

### Download

Mounting instructions [↓ ZIP](#)


### Photometric Files

LDT / IES [↓ ZIP](#)

### Technical Drawings

2D [↓ ZIP](#)


3D [↓ ZIP](#)



### Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F

## Schematic light drawing



h(m)	E(lx)	D(m)
1	1971	0.21
2	493	0.43
3	219	0.64
4	123	0.86
5	79	1.07

## Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	80
Beam angle C0-180 (°)	12
Beam angle C90-270 (°)	12

## Electrical

Insulation class	III
Main voltage (Vac)	24
Driver	Remote excluded
Dimmable	No
Dimming type	Non Dimmable
Emergency type	No

## Notes

Dimmable version on request

## Accessories & Power Supply



### OPTIONAL Power supply

RF25754

Power supply dual function Vout  
24Vdc: 8W/100÷240V Iout  
350ma: 6x1W/100÷240V IP20  
Class II selv\_Non Dimmable



### OPTIONAL Power supply

RF25752

Power supply 24Vdc 20W / 220-  
240V IP67 Class II selv. Non  
Dimmable



### OPTIONAL Power supply

RF25748

Power supply dual function Vout  
24Vdc: 8W/100÷240V Iout  
350ma: 6x1W/100÷240V IP65  
Class II selv. Non Dimmable



### OPTIONAL Accessory

F990H010000

Recessed 3-module junction box  
(model 503)



### OPTIONAL Power supply

F990B27A000

Power supply 24Vdc 70W / 220-  
240V IP67 Class I selv. Non  
Dimmable



### OPTIONAL Power supply

F990B28A000

Power supply 24Vdc 50W / 220-  
240V IP67 Class I selv. Non  
Dimmable