



**piek lettura + piek lettura controller** Design: Sebastian David Büscher



**piek lettura + piek lettura controller** Design: Sebastian David Büscher

**Lichttechnik:**  
230V Power LED  
2700K  
L70/50.000 h

**Reflektor: Flood**  
Abstrahlwinkel 38°

dimmbar


**Anschluss:**  
3 m Zuleitung  
(05RN8-F 3GO,75 mm²)  
inkl. Schutzkontaktstecker  
anschlussfertig

[piek lettura controller:  
inkl. Controller]


ortsveränderlich

**Material:**  
Kopf: Aluminiumguss  
pulverbeschichtet  
Stab: Edelstahl  
pulverbeschichtet  
Fuß: Eisenguss  
pulverbeschichtet  
Klarglas

**Schutzart:**  
IP65



**Lichtrichtung:**



**light technology:**  
230V Power LED  
2700K  
L70/50.000 h

reflector: flood  
beam angle 38°

dimmable


**connection:**  
3 m supply cable  
(05RN8-F 3GO,75 mm²)  
incl. safety plug ready  
to connect

[piek lettura controller:  
incl. controller]


movable

**material:**  
head: aluminium die-casting  
powder-coated  
pole: stainless steel  
powder-coated  
base: iron casting  
powder-coated  
clear glass


protection class:  
IP65






light direction:




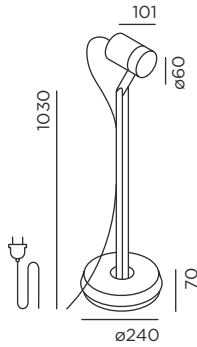


**piek lettura**



Farbe colour	Art.-Nr. item no.	Systemleistung system performance
 anthracite RAL 7016	92075-27-AN	6 W/220 lm
 cool brown	92075-27-CB	6 W/220 lm
 deep black RAL 9005	92075-27-BL	6 W/220 lm

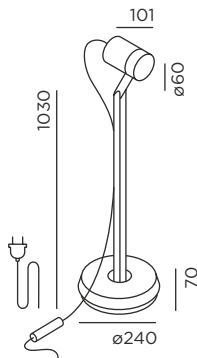**piek lettura controller**



 anthracite RAL 7016	92075-27-AN-CONT	6 W/220 lm
 cool brown	92075-27-CB-CONT	6 W/220 lm
 deep black RAL 9005	92075-27-BL-CONT	6 W/220 lm

Größe in mm  
size in mm

+ **Optional mit piek cover.**  
with piek cover as an option

+ **Optional mit CH-Stecker . Art.-Nr. + Preise in separater Preisliste + www.IP44.de**  
with CH-plug as an option . item no. + prices in separate price list + www.IP44.de

+ **Anschluss optional mit IP44.DE connect.**  
connection with IP44.DE connect as an option.