



reed Design: Sebastian David Büscher

für unbefestigte Beet- und Grünflächen for unpaved beds and greens

Lichttechnik:
230V LED
2700K
L70/50.000 h

dimmbar

Zuleitung:
1,4 m reed M/1,2 m reed L (05RN8-F 2x0,75 mm²)
+ 2 m Driver (05RN8-F 3G1,0 mm²) inkl. Schutzkontaktstecker anschlussfertig

ortsveränderlich

Material:
Aluminiumguss pulverbeschichtet
+ rauchfarbenes Glas;
Stab: Edelstahl pulverbeschichtet

Schutzart:
Leuchte: IP65 . Driver: IP67 . Stecker: IP44

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E

Lichtrichtung:



light technology:
230V LED
2700K
L70/50.000 h

dimmbare

supply cable:
1,4 m reed M/1,2 m reed L (05RN8-F 2x0,75 mm²)
+ 2 m driver (05RN8-F 3G1,0 mm²) incl. safety plug ready to connect



movable

material:
aluminium die-casting powder-coated
+ smoke-coloured glass;
pole: stainless steel powder-coated

protection class:
luminaire: IP65 . driver: IP67 . plug: IP44

This product contains a light source of energy efficiency class E

light direction:

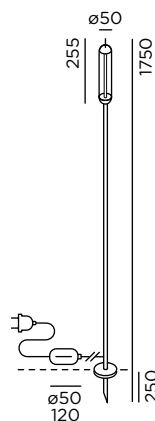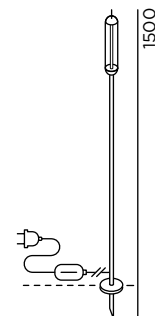

	Farbe colour		Art.-Nr. item no.	Systemleistung system performance
reed M		deep black RAL 9005	93823-BL	4 W/54 lm
reed L		deep black RAL 9005	93824-BL	4 W/54 lm

+ Optional mit CH-Stecker . Art.-Nr. + Preise in separater Preisliste + www.IP44.de
with CH-plug as an option . item no. + prices in separate price list + www.IP44.de

Größe in mm
size in mm