


# FLOS

F011W30A037 Burgundy Red

## Captain Flint Outdoor W1


Designed by Michael Anastassiades, 2020

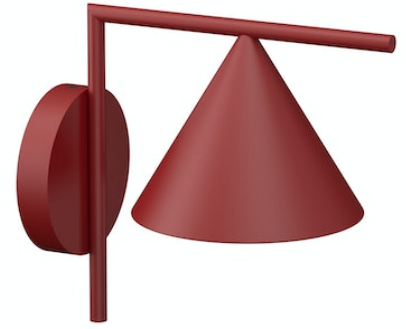

Luminaire for wall-mounting with diffuse light emission and fixed head. LED light source included. Integrated 220-240V ON/OFF or 1-10V/DALI dimmable electrical power. Connection is quickly ensured in the rose with the plug & play electrical connection and the IP68 connector included. Clamp bracket included. 110V version upon request.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

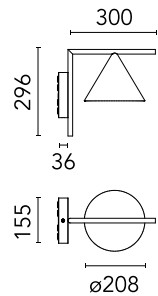

### Main specifications

|                  |                          |
|------------------|--------------------------|
| Mounting         | Ceiling and wall surface |
| LED type         | LED array                |
| Lamp category    | LED                      |
| Number of heads  | 1                        |
| Power (W)        | 9.5                      |
| Source flux (lm) | 1026                     |
| System flux (lm) | 652                      |

### Physical

|                     |              |
|---------------------|--------------|
| Colour              | Burgundy Red |
| Trim                | No           |
| Orientation         | Fixed        |
| Recessed depth (mm) | 0            |
| Spot diameter (mm)  | 208          |
| Length (mm)         | 336          |
| Net weight (kg)     | 2.1          |
| IP internal         | 65           |

### Download

[Mounting instructions](#) ZIP

### Photometric Files

[LDT / IES](#) ZIP

### Technical Drawings


[2D](#) ZIP

[3D](#) ZIP

[Bim](#) ZIP



## Schematic light drawing



Beam Angle: 114°

| h(m) | E(lx) | D(m)  |
|------|-------|-------|
| 1    | 225   | 3.05  |
| 2    | 56    | 6.11  |
| 3    | 25    | 9.16  |
| 4    | 14    | 12.22 |
| 5    | 9     | 15.27 |

## Photometric

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| Light distribution     | Symmetric |
| CCT (K)                | 3000      |
| CRI>                   | 80        |
| Beam angle C0-180 (°)  | 112       |
| Beam angle C90-270 (°) | 112       |

## Electrical

|                    |              |
|--------------------|--------------|
| Insulation class   | I            |
| Frequency (Hz)     | 50-60        |
| Main voltage (Vac) | 220-240      |
| Driver             | Integrated   |
| Dimmable           | No           |
| Dimming type       | Non Dimmable |
| Precabled          | no           |
| Emergency type     | No           |
| Batteries inside   | No           |

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

## Notes

110V version upon request.