
Radium

Product Datasheet Date: 19.10.2024





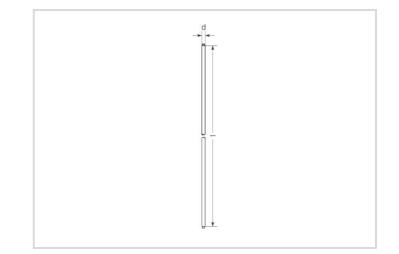

General Data

Article No.	31119595
Code	NL-T5 8W/840/G5
Product EAN	4008597195952
Box quantitiy (pcs.)	25
EAN Box	4008597595950
Gross weight of box in kg	0.889
Length of box in m	0.316
Width of box in m	0.103
Height of box in m	0.109
Product weight	26 g
Product status	Inactive

Electric Parameters

Rated wattage	7.5 W
Weighted energy consumption in 1,000 hours	8 kWh
Lamp voltage	56 V
Mains voltage	230 V
Compensation capacitor for 50Hz operation	2 µF

Fluorescent lamp Spectralux®

NL-T5 8W/840/G5

Radium

Electric Parameters

dimmable	Yes
Controllable (in suitable circuit)	Yes

Light Application Parameters

Luminous flux	420 lm	
Rated lamp luminous flux	420 lm	
Beam angle	360 °	
Luminous efficiency	56 lm/W	
Code of light color	840	
Colour temperature	4000 K	
Color coordinate X	0.380	
Color coordinate Y	0.380	
Color rendering index	? 80	

Service Life

Average nominal lifespan	10000 h
Lamp survival factor at 6000h	0.95

Specification

Energylabel notice	current label, with EPREL registration
Energy Label A to G	G
Diameter max.	16 mm
Tube diameter	16 mm
Length max.	300 mm
Length	288 mm
Burning position	h180
Mercury content	2.6 mg
Lamp shape	Rod
Base	G5
Colour	White

Notes on Operation

Burning position

h180

Information especially for EPREL

Energylabel notice

current label, with EPREL registration

Fluorescent lamp Spectralux®

NL-T5 8W/840/G5



EPREL ID number

541147

Fluorescent lamp Spectralux®

NL-T5 8W/840/G5

Radium

Miscellaneous

EU-date of phase-out	25.08.2023
EU Directive	RoHS

Notes

Fluorescent lamp T5 - 16mm diameter, light colour 840, high luminous efficiency, good colour rendering, long life, base G5. Controllable by Dim-ECG.

Please, refer to <u>www.radium.de/recycling</u> for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value. The optinal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Base




G5 IEC/EN 60061-1 sheet 7004-52-5

Spectrum


Natural daylight is a mixture of direct sunlight and the light of the sky. Therefore, its spectral composition changes permanently due to the changing time of day. The standardised light classification D65 corresponds to a daylight with a colour temperature of approximately 6500 K. Every fluorescent lamp type has got an individual spectral power distribution according to its phosphor coating inside the bulb. From this result important properties light colour or colour rendering.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm) per 10nm.



light colour 840 Spectralux® white (21)

Special features




General notes

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages. (B) = Registered trademark

Subject to change without notice. Errors and omissions excepted.





daylight(D 65)

NL-T5 8W/840/G5

