


ZINER N30 A (B)


Code: ZNJ0200000



ZINER (BL)

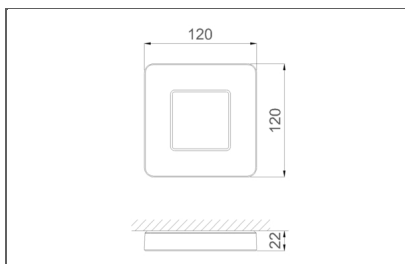

ZINER

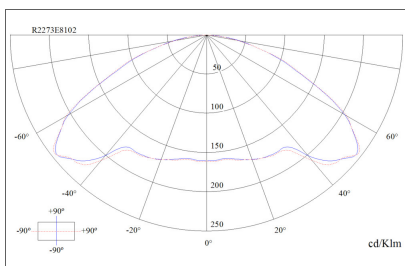

Description:

Square, extra slim emergency luminaire. The frame, manufactured in aluminium, in addition to the heat sink is the support for the electronic system, the batteries and the optical group. The combined use of specific lenses and reflectors ensure optimum performance in open area lighting and escape routes. Suitable for ceiling mounting. Consists of a LED technology light source that is switched on if the mains power fails. An internal microprocessor checks the status of the device and periodically performs tests of functionality and autonomy and informs of the status, using an optical device on the middle of the reflector. The tests can be requested manually by means of an ON Remote Control order when connected to the mains.

Characteristics:

Format: Ziner CC
 Operation: Non-maintained LED AutoTest
 Duration (h): 1
 Emergency lamp: MHBLED
 Charging indicator: LED
 Protection rating: IP43 IK04
 Electrical insulation: Type II
 Test device: AutoTest
 Remote control connection: Yes
 Battery type: LiFePO4

Finishes:

Ziner application: IP43
 Optical group: Open area
 Colour: White
 Voltage: 220-230V 50/60Hz

Photometry:

Luminous flux in emergency (lm):250

**Daisalux reserves the right to change, update or remove the information contained in this document without prior warning. The selected finishes may not coincide with the displayed images.