


BLOCK P30 A


Code: BLM0100000



Block

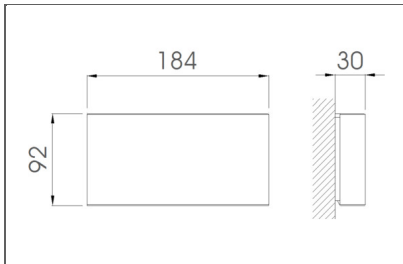

Block

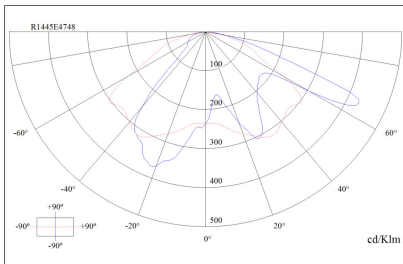

Description:

Rectangular aluminum body composed of a small size optical assembly consisting of aluminized reflector and polycarbonate diffuser. Provides LED light source that illuminates whether or not there is mains power supply. An internal microprocessor checks the status of the device and periodically performs functionality and autonomy tests and reports the status using the two LED indicator lights that it includes. The tests can be requested manually by means of an ON Remote Control order when connected to the mains. Equipped with a sensor built into the reflector which enables constant activation-deactivation depending on the level of available light, thus optimising consumption. Has an Eco-maintained function.

Characteristics:

Format: Block
 Operation: Maintained LED AutoTest
 Duration (h): 1
 Emergency lamp: MHBLED
 Charging indicator: LED
 Mains lamp: MHBLED
 Protection rating: IP43 IK04
 Electrical insulation: Type II
 Test device: AutoTest
 Remote control connection: Yes
 Battery type: NiMH

Finishes:

Colour: White
 LED Colour Tone: Cool white (6000°K-7000°K)
 Voltage: 220-230V 50/60Hz

Photometry:

Luminous flux in emergency (lm):200
 Luminous flux with supply (lm):120

**Daisalux reserves the right to change, update or remove the information contained in this document without prior warning. The selected finishes may not coincide with the displayed images.