


## ATRIA N22 A (AT, B)


Code: ATJ0100000



ATRIA 22 (AT,B)

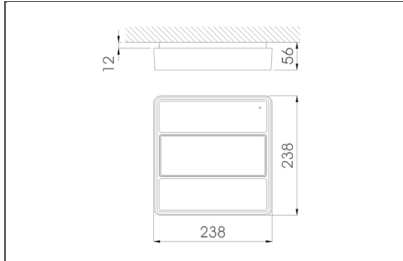

ATRIA CEILING/WALL

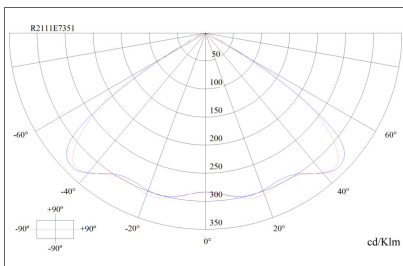

### Description:

Emergency luminaire for installation at significant heights and in large indoor spaces. The frame, manufactured in aluminium, in addition to the heat sink is the support for the electronic system, the batteries and the optical group. The combined use of specific lenses and aluminium-coated reflectors ensure optimum performance in open area lighting and escape routes. Suitable for mounting on walls or ceilings. It consists of 4 or 8 LEDs with independent lenses that are illuminated if the mains fails. An internal microprocessor checks the status of the device and periodically performs functionality and autonomy tests and reports the status using the two LED indicator lights that it includes. The tests can be requested manually by means of an ON Remote Control order when connected to the mains.

### Characteristics:

Format: Atria  
 Operation: Non-maintained LED AutoTest  
 Duration (h): 1  
 Emergency lamp: MHBLED  
 Charging indicator: LED  
 Protection rating: IP43 IK04  
 Electrical insulation: Type II  
 Test device: AutoTest  
 Remote control connection: Yes  
 Battery type: LiFePO4

### Finishes:

Optical group: Open area on ceiling  
 Colour: White  
 LED Colour Tone: Cool white (6000°K-7000°K)  
 Voltage: 220-230V 50/60Hz

### Photometry:

Luminous flux in emergency (lm):1000

\*\*Daisalux reserves the right to change, update or remove the information contained in this document without prior warning. The selected finishes may not coincide with the displayed images.