

CLAVO-MD B (OPAL)

Code: CMB0103000



Clavo-MD B (OPAL)

Description:

Very small flat-fitting unit comprising a cylindrical stainless steel body and a polycarbonate diffuser that picks up the LED colour. 24 V AC/DC power supply. LED diode light source. It includes accessories to enable operation only when connected to the mains power supply (TL safety transformer) or with the mains power on or off (PBL equipment). Beacon indicated for use in hard materials (stone, block, brick.). Supplied with a 1.5 m cable.

Characteristics:


Format: Clavo-MD
 Operation: Luminaire
 Mains lamp: White LED
 Protection rating: IP64 IK07
 Duration (h): 0

Finishes:


Diffuser: Opal
 Voltage: 24 V AC/DC

Photometry:

Luminous flux in emergency (lm):1
 Luminous flux with supply (lm):1

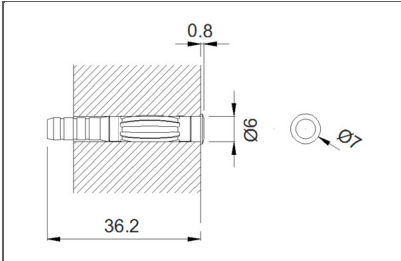

Clavo-MD

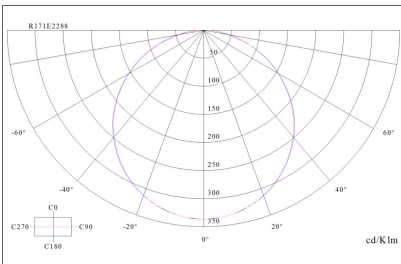

**Daisalux reserves the right to change, update or remove the information contained in this document without prior warning. The selected finishes may not coincide with the displayed images.