


## IKUS2211-T P A (RTD1628)

Code: IPM0102800



Ikus2211-T (RTD1628)

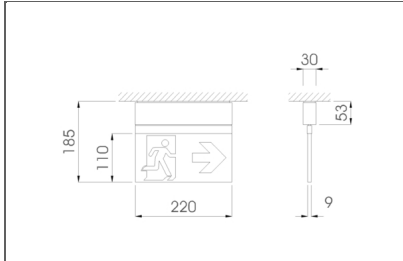

Ikus2211-T

### Description:

Signalling and evacuation luminaires. Ceiling-mounted aluminium profile and a signalling plate 220x110 mm, composed of two sheets manufactured in thermomoulded PETG with digitally printed sign and diffuser film. Luminance of 500 cd/m<sup>2</sup> in contrast white, with or without mains supply. Indoor IP65. They supply permanent lighting or signalling using LED technology. An internal microprocessor checks the status of the device and periodically performs functionality and autonomy tests and reports the status using the two LED indicator lights that it includes. The tests can be requested manually by means of an ON Remote Control order when connected to the mains.

### Characteristics:

Format: Ikus2211-T  
 Operation: Maintained LED AutoTest  
 Duration (h): 1  
 Emergency lamp: ILMLED  
 Charging indicator: LED  
 Mains lamp: ILMLED  
 Protection rating: IP65 IK04  
 Electrical insulation: Type II  
 Test device: AutoTest  
 Remote control connection: Yes  
 Battery type: NiMH

### Finishes:

Number of signs: 2 Signs  
 Signs: RTD1628 (Right Exit) EU  
 Colour: Silver grey  
 Voltage: 220-230V 50/60Hz

\*\*Daisalux reserves the right to change, update or remove the information contained in this document without prior warning. The selected finishes may not coincide with the displayed images.