


## ZINER N30 A (EVC, B)


Code: ZNJ0201000



ZINER (EVC,BL)

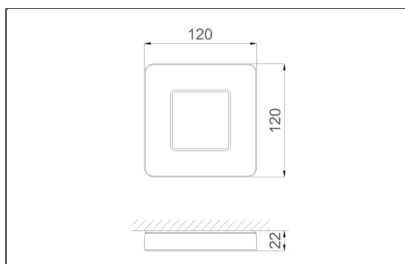

ZINER

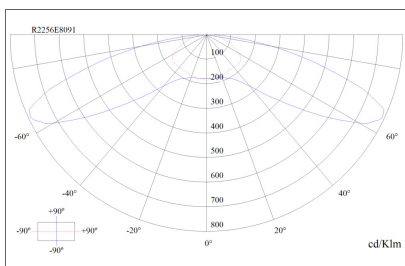

### Description:

Square, extra slim emergency luminaire. The frame, manufactured in aluminium, in addition to the heat sink is the support for the electronic system, the batteries and the optical group. The combined use of specific lenses and reflectors ensure optimum performance in open area lighting and escape routes. Suitable for ceiling mounting. Consists of a LED technology light source that is switched on if the mains power fails. An internal microprocessor checks the status of the device and periodically performs tests of functionality and autonomy and informs of the status, using an optical device on the middle of the reflector. The tests can be requested manually by means of an ON Remote Control order when connected to the mains.

### Characteristics:

Format: Ziner CC  
 Operation: Non-maintained LED AutoTest  
 Duration (h): 1  
 Emergency lamp: MHBLED  
 Charging indicator: LED  
 Protection rating: IP43 IK04  
 Electrical insulation: Type II  
 Test device: AutoTest  
 Remote control connection: Yes  
 Battery type: LiFePO4

### Finishes:

Ziner application: IP43  
 Optical group: Escape route  
 Colour: White  
 Voltage: 220-230V 50/60Hz

### Photometry:

Luminous flux in emergency (lm):250

\*\*Daisalux reserves the right to change, update or remove the information contained in this document without prior warning. The selected finishes may not coincide with the displayed images.