


NAOS N5 A (N)


Code: NAJ0110000



NAOS (ANT,N)

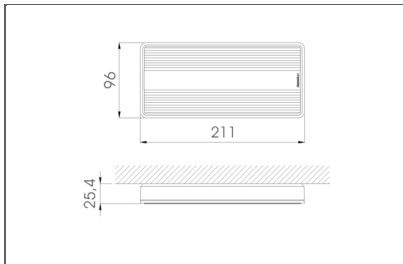

Naos

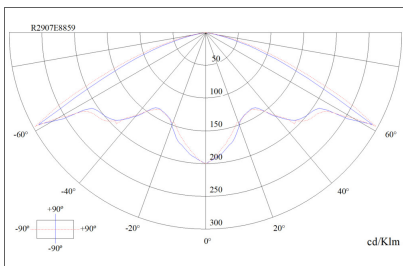

Description:

Rectangular emergency luminaire with rounded edges made of synthetic material. LiFePO4 batteries with electronics to control charging according to temperature, and independent voltage control for each module. The use of MCRLED micro-structured flat diffusers ensures optimum light performance in a wide range of ceiling and wall installation heights. It has a LED light source that turns on during a mains failure. An internal microprocessor checks the status of the device and periodically performs functionality and autonomy tests and reports the status using the two LED indicator lights that it includes. The tests can be requested manually by means of an ON Remote Control order when connected to the mains.

Characteristics:

Format: Naos
 Operation: Non-maintained LED
 Duration (h): 1
 Emergency lamp: ILMLED-NAOS
 Charging indicator: LED
 Electrical insulation: Type II
 Test device: AutoTest
 Remote control connection: Yes
 Battery type: LiFePO4

Finishes:

Colour: Black
 Optical group: Open area IP43 IK04
 Voltage: 220-230V 50/60Hz

Photometry:

Luminous flux in emergency (lm):160

**Daisalux reserves the right to change, update or remove the information contained in this document without prior warning. The selected finishes may not coincide with the displayed images.