


IZAR N30 A (DIF)

Code: IZJ0102000

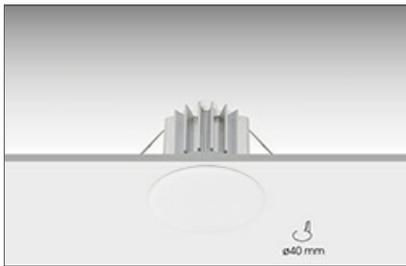

Izar (DIF)

Description:


Luminaire formed by three independent modules: optical group, electronic system and batteries. Two lens options: escape route and open area. The "escape route" optical group allows a greater placement inter-distance in places such as corridors, achieving adequate lighting in evacuation routes. Luminaire using LED technology, Ø 46mm. Suitable for flush mounting on suspended ceiling. Provides LED light source that illuminates on power failure. An internal microprocessor checks the status of the device and periodically performs functionality and autonomy tests and reports the status using the two LED indicator lights that it includes. The tests can be requested manually by means of an ON Remote Control order when connected to the mains.

Characteristics:

Format: Izar PF44
 Operation: Non-maintained LED AutoTest
 Duration (h): 1
 Emergency lamp: MHBLED
 Charging indicator: LED
 Protection rating: IP 43/20; IK04
 Electrical insulation: Type II
 Test device: AutoTest
 Remote control connection: Yes
 Battery type: LiFePO4

Finishes:


Optical group: Diffuser
 LED Colour Tone: Cool white (6000°K-7000°K)
 Colour: White
 Voltage: 220-230V 50/60Hz

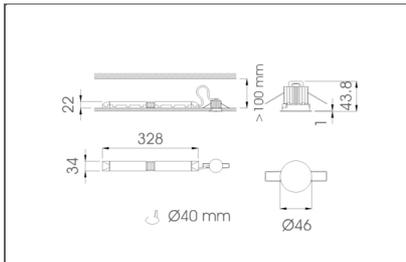

Izar PF44

Photometry:

Luminous flux in emergency (lm):180

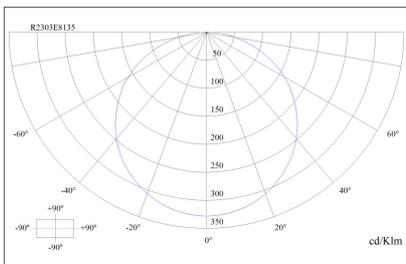

**Daisalux reserves the right to change, update or remove the information contained in this document without prior warning. The selected finishes may not coincide with the displayed images.