

Lens Wall-mounted

Emergency luminaires

DISCOUNT LEVEL B

Model	Installation height(m)	Duration	Format	Lumens	Light source	€
Non-maintained:						
Lens N30 (ESP)	2.2 to 5.5	1h	Short	200	MHB _{LED}	-----
Lens 2N30 (ESP)	2.2 to 5.5	2h	Length	200	MHB _{LED}	-----
Lens 3N30 (ESP)	2.2 to 5.5	3h	Length	180	MHB _{LED}	-----

Model	Installation height(m)	Duration	Format	Lumens	Light source	€
Maintained: (1)						
				Emerg. Lum.		
Lens P30 (ESP)	2.2 to 5.5	1h	Short	200	110	MHB _{LED} -----
Lens 2P30 (ESP)	2.2 to 5.5	2h	Length	200	110	MHB _{LED} -----
Lens 3P30 (ESP)	2.2 to 5.5	3h	Length	180	110	MHB _{LED} -----

Lens Wall-mounted A Lens Wall-mounted TCA

Specifically for Self-test

Specifically for Self-test and DaisaTest System.

Includes microprocessor for Self-test mode operation A or DaisaTest centralised management system TCA
 Fill out the reference with A or TCA depending on the model. TEV test control unit for Lens (ESP) TCA: See page 117
 Example of order: Lens N30 A (ESP) / Lens N30 TCA (ESP)

Model	Installation height(m)	Duration	Format	Lumens	Light source	A €	TCA €
Non-maintained:							
Lens N30 <input type="checkbox"/> (ESP)	2.2 to 5.5	1h	Short	200	MHB _{LED}	-----	-----
Lens 2N30 <input type="checkbox"/> (ESP)	2.2 to 5.5	2h	Length	200	MHB _{LED}	-----	-----
Lens 3N30 <input type="checkbox"/> (ESP)	2.2 to 5.5	3h	Length	180	MHB _{LED}	-----	-----

Model	Installation height(m)	Duration	Format	Lumens	Light source	A €	TCA €
Maintained: (1)							
				Emerg. Lum.			
Lens P30 <input type="checkbox"/> (ESP)	2.2 to 5.5	1h	Short	200	110	MHB _{LED}	-----
Lens 2P30 <input type="checkbox"/> (ESP)	2.2 to 5.5	2h	Length	200	110	MHB _{LED}	-----
Lens 3P30 <input type="checkbox"/> (ESP)	2.2 to 5.5	3h	Length	180	110	MHB _{LED}	-----

Lens Wall-mounted DALI

Specifically for DALI System

Models for the DALI system are available. By arrangement with the factory.

Lens Wall-mounted Luminaire

DOES NOT INCLUDE BATTERY



Luminaire specific function

Model	Installation height(m)	Format	Lumens	Light source	€
Lens L30 (ESP)	2.2 to 5.5	Short	200	MHB _{LED}	-----




Lens Wall-mounted

Lens (ESP)

Short format



Long format

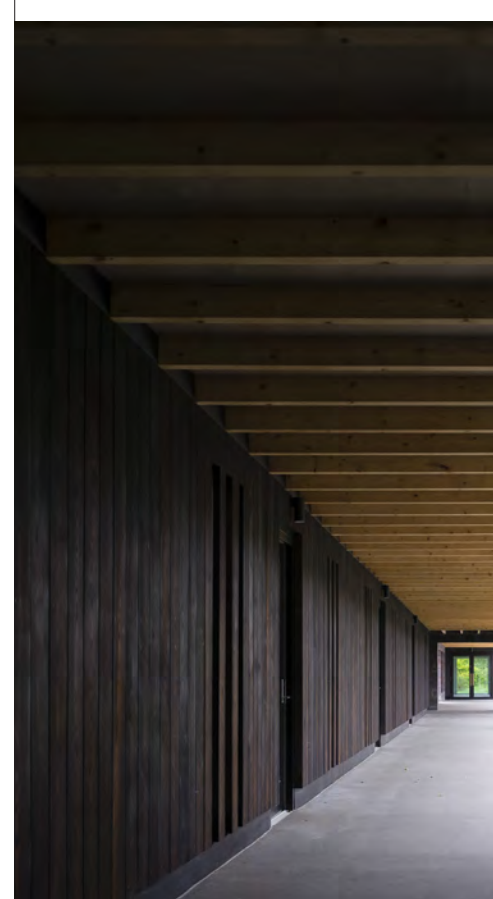



Lens Wall-mounted

Lens (ESP)



Short format

Lens (ESP,AEX)



Long format

Lens (ESP,AEX)



■ Finishes

DISCOUNT LEVEL B

Finish of	Description	Marking	Incr. €
Application	Indoor IP40	(ESP)	-----
	Indoor IP65	(ESP,IP65)	-----
	All-weather IP65 Only "anodised stainless steel" colour. Only non-maintained A, TCA and Luminaire models	(ESP,AEX)	-----
Colour: Only indoor IP40 Only indoor IP65	White (as standard)	-----	-----
	Silver grey	(RAL9006)	-----
	Black	(N)	-----
LED colour	Cool white (as standard)	---	-----
	Warm white. The luminous flux is reduced by 20% Only Maintained and Luminaire models	(WW)	-----
Power supply:			
Self-contained	220-230V 50/60Hz	-----	-----
	110-127V 50/60Hz	(110-127V)	-----
Luminaires	110-240V 50/60Hz, 170-320V DC	-----	-----
	24V 50/60Hz, 18-30V DC	(24V)	-----



Operation, shared data and notes:

The emergency luminaires equipped with Ni-Mh battery technology include a pulse-load microprocessing system that enables an important reduction of energy consumption.

The A and TCA Maintained models have an Eco-maintained function.

(1) Maintained models have a separate connection to the mains that enables turning the luminaire on/off at will.

Built to the EN 60598-2-22 (IEC 60598-2-22) standard. Features plug & play and anchoring system.