

## LENS N30 A (ESP,AEX, INOX)

Code: XNJ02I3000



Lens (ESP, AEX) CC

### Description:

Self-contained LED emergency luminaire. Cylindrical body and polycarbonate diffuser. Provides LED light source that illuminates on power failure. An internal microprocessor checks the status of the device and periodically performs functionality and autonomy tests and reports the status using the two LED indicator lights that it includes. The tests can be requested manually by means of an ON Remote Control order when connected to the mains.

### Characteristics:


Format: Lens  
 Operation: Non-maintained LED AutoTest  
 Duration (h): 1  
 Installation height (m): 2.5 to 4  
 Emergency lamp: MHBLED  
 Charging indicator: LED  
 Protection rating:  
 Electrical insulation: Type II  
 Test device: AutoTest  
 Remote control connection: Yes  
 Battery type: NiMH

### Finishes:


Format: Wall-mounted AEX. IP65 IK04  
 Colour: Stainless  
 Voltage: 220-230V 50/60Hz

### Photometry:

Luminous flux in emrgency (lm):200

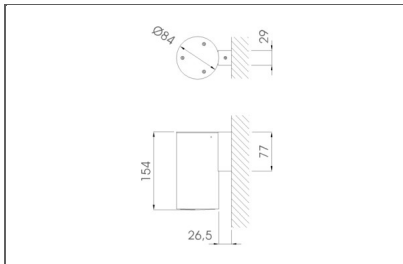

Lens-ESP (AEX) CC

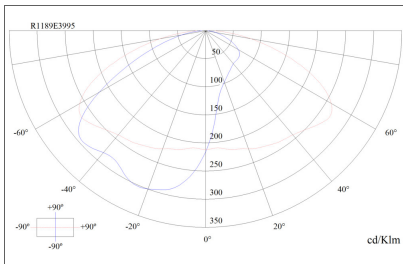

\*\*Daisalux reserves the right to change, update or remove the information contained in this document without prior warning. The selected finishes may not coincide with the displayed images.