


## IKUSMET2211-M P A (RTD1628)

Code: ITM0400028



IKUSMET2211-M-(RTD1628,GR)

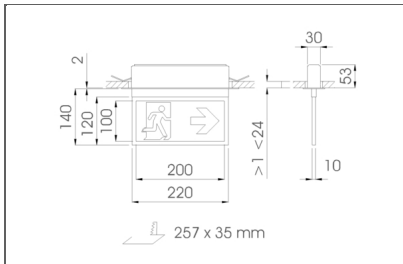

IkusMET2211-M

### Description:

Signalling and evacuation luminaires. Consists of an aluminium section and a methacrylate signalling plate. Including an engraved sign attached to the back of 200x100 mm. The profile that houses the battery and electronic circuit is recessed in the suspended ceiling and secured with a screw-mounting system. Indoor IP65. They supply permanent lighting or signalling using LED technology. An internal microprocessor checks the status of the device and periodically performs functionality and autonomy tests and reports the status using the two LED indicator lights that it includes. The tests can be requested manually by means of an ON Remote Control order when connected to the mains.

### Characteristics:

Format: IkusMET2211-M  
 Operation: Maintained LED AutoTest  
 Duration (h): 1  
 Emergency lamp: ILMLED  
 Charging indicator: LED  
 Mains lamp: ILMLED  
 Protection rating: IP65 IK04  
 Electrical insulation: Type II  
 Test device: AutoTest  
 Remote control connection: Yes  
 Battery type: NiMH

### Finishes:

Signs: RTD1628 (Right Exit) EU  
 Colour: Silver grey  
 Voltage: 220-230V 50/60Hz

\*\*Daisalux reserves the right to change, update or remove the information contained in this document without prior warning. The selected finishes may not coincide with the displayed images.