


# FLOS

F011W40D059 Brass Finish

## Captain Flint Outdoor W1 Dimmable DALI


Designed by Michael Anastassiades, 2020

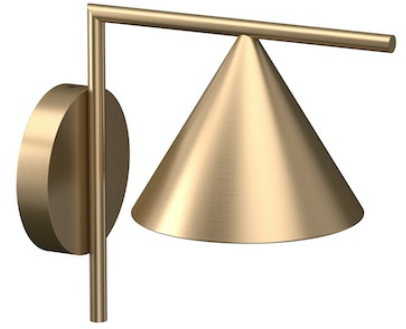

Luminaire for wall-mounting with diffuse light emission and fixed head. LED light source included. Integrated 220-240V ON/OFF or 1-10V/DALI dimmable electrical power. Connection is quickly ensured in the rose with the plug & play electrical connection and the IP68 connector included. Clamp bracket included. 110V version upon request.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

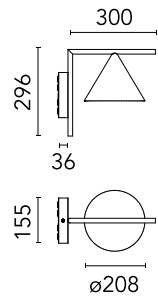


### Main specifications

Mounting	Ceiling and wall surface
LED type	LED array
Lamp category	LED
Number of heads	1
Power (W)	9.5
Source flux (lm)	1099
System flux (lm)	699

### Physical

Colour	Brass Finish
Trim	No
Orientation	Fixed
Recessed depth (mm)	0
Spot diameter (mm)	208
Length (mm)	336
Net weight (kg)	2.1
IP internal	65

### Download

[Mounting instructions](#)  ZIP

### Photometric Files

[LDT / IES](#)  ZIP

### Technical Drawings


[2D](#)  ZIP

[3D](#)  ZIP

[Bim](#)  ZIP



## Schematic light drawing



Beam Angle: 114°

h(m)	E(lx)	D(m)
1	242	3.05
2	60	6.11
3	27	9.16
4	15	12.22
5	10	15.27

## Photometric


Lighting type	Direct
Light distribution	Symmetric
CCT (K)	4000
CRI>	80
Beam angle C0-180 (°)	112
Beam angle C90-270 (°)	112

## Electrical


Insulation class	I
Frequency (Hz)	50-60
Main voltage (Vac)	220-240
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable DALI 1
Precabled	no
Emergency type	No
Batteries inside	No

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

## Notes

110V version upon request.