





# STRANGE trimless

Ceiling recessed



## 1.0 LED

LED COB 6/9W | 350/500mA | 17V aluminium

IP20 0°-35°/355° 34° SDCM2 L80/55K 0.43kg

CODE
131461W_
131461M_
131461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	510/685	>90	3
3000K	550/740	>90	5
2000-3000K	365/535	>90	9

LED module 20 years replaceability

## ALWAYS USE



alu plasterkit 86x86 11.95 7-32

CODE
90017120

driver | 500mA

	CODE
10W	90214406
10W dim	90224403
24W DALI	90244701

more options and specs on page 808

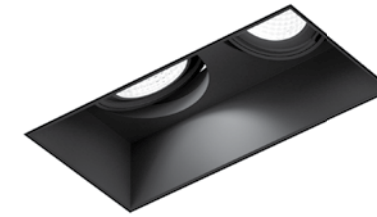

## 2.0 LED

2x COB 6/9W | 350/500mA | 17V aluminium

IP20 0°-35°/355° 34° SDCM2 L80/55K 0.74kg

CODE
131561W_
131561M_
131561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x510/685	>90	3
3000K	2x550/740	>90	5
2000-3000K	2x365/535	>90	9

LED module 20 years replaceability

## ALWAYS USE


alu plasterkit 86x156 11.95 7-32

CODE
90017121

driver | 500mA | only 1x needed

	CODE
20W	90218601
20W dim	90224602
24W DALI	90244701

more options and specs on page 807



## 1.0 PAR16

PAR16 max. 12W | GU10 100-240VAC | 50-60Hz aluminium

IP20 0°-35°/355° 0.41kg

CODE
131120W0
131120M0
131120B0

## ALWAYS USE


alu plasterkit 86x86 11.125 7-32

CODE
90017120

## OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K   460lm	901228W3
2700K   437lm	901228B3
3000K   500lm	901228W5
3000K   457lm	901228B5



## 2.0 PAR16

2x PAR16 max. 12W | GU10 100-240VAC | 50-60Hz aluminium

IP20 0°-35°/355° 0.70kg

CODE
131220W0
131220M0
131220B0

## ALWAYS USE

alu plasterkit 86x156 11.125 7-32

CODE
90017121

## OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K   460lm	901228W3
2700K   437lm	901228B3
3000K   500lm	901228W5
3000K   457lm	901228B5