








PLANO

Ceiling surface

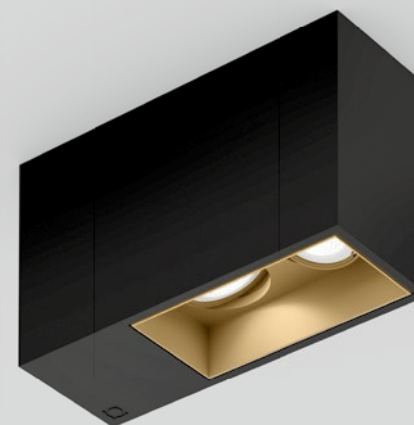

1.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-30°/355° A-34° SDCM2 L80|55K 1.15kg

2.0 LED

LED COB 22W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-30°/355° A-34° SDCM2 L80|55K 1.62kg

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-30°/355° 1.39kg

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-30°/355° 1.51kg

| | CODE |
|--|-----------|
| | 118564W_ |
| | 118564E_ |
| | 118564CH_ |
| | 118564B_ |

| LIGHT COLOUR | LUMEN CRI | CODE |
|--------------|-----------|------|
| 2700K | 570 >90 | 3 |
| 3000K | 630 >90 | 5 |
| 2000-3000K | 535 >90 | 9 |



MORE BEAM ANGLES ONLINE
weverducre.com/more-plano-surface

| | CODE |
|--|-----------|
| | 118520W_ |
| | 118520E_ |
| | 118520CH_ |
| | 118520B_ |

| LIGHT COLOUR | LUMEN CRI | CODE |
|--------------|-----------|------|
| 2700K | 2x570 >90 | 3 |
| 3000K | 2x630 >90 | 5 |
| 2000-3000K | 2x535 >90 | 9 |

| | CODE |
|--|-----------|
| | 118520W0 |
| | 118520E0 |
| | 118520CH0 |
| | 118520B0 |

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

| | CODE |
|---------------|----------|
| 2700K 460lm | 901228W3 |
| 2700K 437lm | 901228B3 |
| 3000K 500lm | 901228W5 |
| 3000K 457lm | 901228B5 |

| | CODE |
|--|-----------|
| | 118620W0 |
| | 118620E0 |
| | 118620CH0 |
| | 118620B0 |

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

| | CODE |
|---------------|----------|
| 2700K 460lm | 901228W3 |
| 2700K 437lm | 901228B3 |
| 3000K 500lm | 901228W5 |
| 3000K 457lm | 901228B5 |