



WEVER & DUCRÉ  
LIGHTING

# FINELLE 1.0

272184M3

Project

Type

Notes

Quantity

Date

## GENERAL

Ceiling , Suspended

Champagne

IP20

Interior

Output: 950 lm

## LED

2700 K

CRI  $\geq$  90

3 SDCM

3 SDCM

## OPTICAL

Clear cover

## ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 11.0 W

Class 2


## PHYSICAL

Length 1246 mm

Width 60 mm

Height 60 mm

1.95 kg

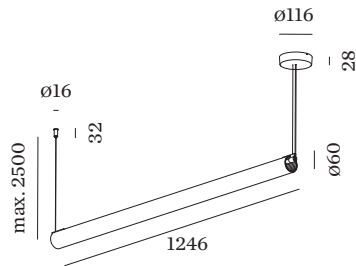



WEVER & DUCRÉ  
LIGHTING

# FINELLE

## 1.0

272184M3

### Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.92	0.9
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF <sup>a</sup>	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF <sup>a</sup>	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.