

## **SNEAK 2.0**





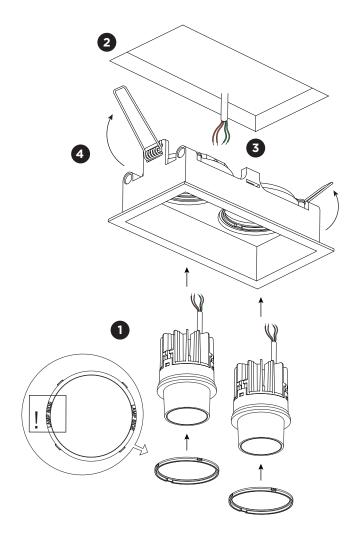



2.0 LOXONE

## MOUNTING INSTRUCTION

- 1 Put the LED modules in the assembly set and fix them with the spring clips.
- 2 Make a hole in the ceiling according to the prescribed dimensions.
- 3 POWER CONNECTION

Connect the wires to the connectors. Input voltage 20-28V.









4 Push the springs upwards and insert the fixture in the ceiling hole.







Power must be turned off before connecting the cables. This fixture only works with Loxone TREE.






## SNEAK 2.0 INSTALLATION INSTRUCTIONS | AUGUST 2024

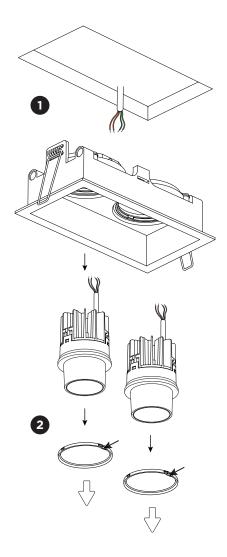



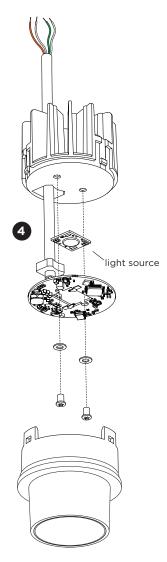



## DISMOUNTING AND RECYCLING INSTRUCTIONS Light source

- Remove the fixture from the ceiling and disconnect the wires.
- 2 Push in the slot of the spring clip(s) and pull it/them down to remove the LED module(s).
- Push at the three points to loosen the front ring(s).
- 4 Unscrew the light source(s) to remove it/them.



The light source is replaceable by Wever & Ducré or by a professional with explicit authorisation. For more information please contact your local Wever & Ducré customer service point.



This luminaire contains a light source with the energy class F.