
KTRIBE T2

Designed by Philippe Starck, 2007

F6303007

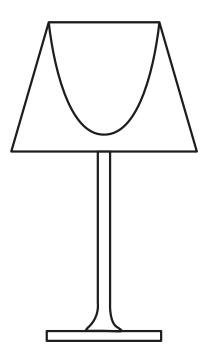

FLOS

EN

KTRIBE T2 F6303007

01. F6278007 - Soft fabric diffuser assembly

02. RF28206 - Led dimmer 1004P LFP100-240V 4-150WHL 4-25W


KTRIBE T2 F6303007

ΕN

F6278007

SOFT FABRIC DIFFUSER ASSEMBLY





KTRIBE T2 F6303007

F6278007

SOFT FABRIC DIFFUSER ASSEMBLY

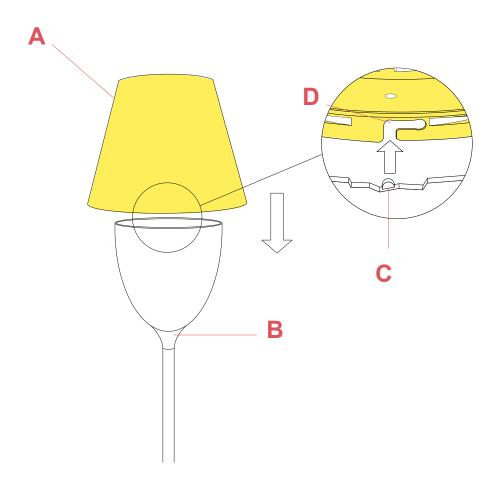


Fig.1


Install the external diffuser (A) onto the internal diffuser (B) being careful to make the three pins (C) in the internal diffuser correspond with the relative housings (D) in the external diffuser. Once carried out this operation it is necessary to lock the external diffuser by turning it slightly clockwise.

KTRIBE T2 F6303007

RF28206

LED DIMMER 1004P LFP100-240V 4-150WHL



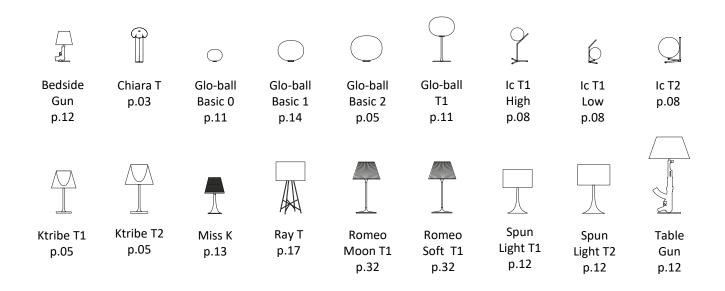

KTRIBE T2 F6303007

RF28206

LED DIMMER 1004P LFP100-240V 4-150WHL



Fig.1



Fig.2

Open the dimmer box of the damaged dimmer. For the opening, it is necessary to remove the $n^{\circ}2$ screws using a star screw driver.


Lift-up the dimmer casing from the dimmer base;

KTRIBE T2 F6303007

RF28206

LED DIMMER 1004P LFP100-240V 4-150WHL





Remove the cable clamps by unfastening the 4 screws (A) and disconnect the wires from the terminal blocks through a tiny flat headed screw driver;

Replace the dimmer and connect the wires. When connecting the wires it is necessary to respect the polarities (L = Brown and N = Blue) to the terminal box.

Lock the electrical cables by fastening the screws (A) of the cable clamps and make sure to block the isolation of the electrical cable.

Close the dimmer box.

It is necessary to place the casing on top and press down until it locks in.

it is necessary to insert the $n^\circ 2$ screws using a star screw driver

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

Fig.4

