


NINA











NINA

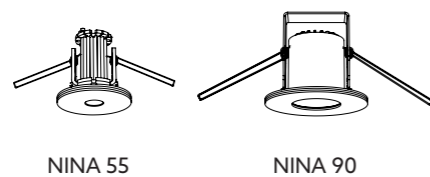

driver 1/2 spot(s) NINA 55 non dim - I9D2ZW
 driver 1/2 spots NINA 55/90 triac dim - OD02DT02
 driver 1/2 spots NINA 55/90 dali dim - ID01DP08



	NINA 55	NINA 90
BRONZE	U108E1DOE	U109E1DOE
NICKEL	U108E1DNM	U109E1DNM
WHITE	U108E1DWL	U109E1DWL
BLACK	U108E1DZL	U109E1DZL
LED		
CCT	2700K	2700K
ANGLE	32° ¹	25° ²
MAX. CURRENT	350mA	350mA
WATT	2,5W	6W
LUMEN	225	740
CLASS		
GEAR	not incorporated	not incorporated
DIMMABLE	-	-
DIMENSIONS	D55xh58	D90xh80
	45mm	75-80mm

¹15° possible on request
²60° possible on request