
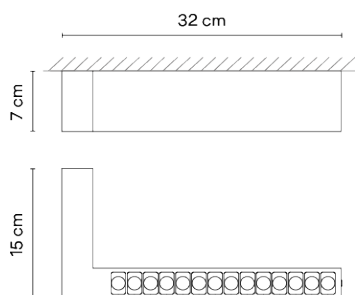


The Offset ceiling light is characterised by its linear design and easy surface installation. The Low-Glare High Efficiency linear model allows for highly energy efficient installations and minimal glare. The structure is aluminium with powerful Led light strips, a versatile fitting offering static and Tunable White lighting options to customise spaces according to individual project requirements. A stylish and sustainable solution for a warm and light filled ambience.

Model Sheet

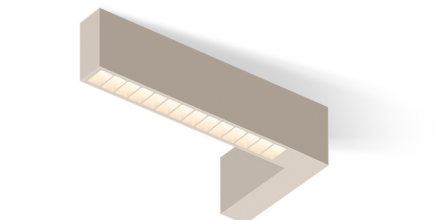

Finish

90 Black
NCS S 8500N

24 Beige M1
NCS S 2005-Y50R

23 Warm White
NCS S 0502-Y50R

LED

2700 K / 3000 K / 3500 K / Tunable White

Control

PROTOPIXEL / CASAMBI / DALI / PUSH

Electrical connection Surface

Light source

1 x LED STRIP 13,7W 650mA



LED

CRI>90 1674 lm 122.63
2700 K / 3000 K / 3500 K / Tunable White

Driver

Constant Current 650 mA 220~240 V
50~60 Hz



Dimmable LED IP20 50-60Hz

Application

Ceiling


Packaging

1 Box
0.427 m x 0.293 m x 0.105 m
Gross weight 2.5 kg
Net weight 1 kg
Vol. 0.0131 m³



Lighting effect

Linear High Efficiency -

High energy efficiency and low glare levels UGR<19 for linear light applications



Photometric Data

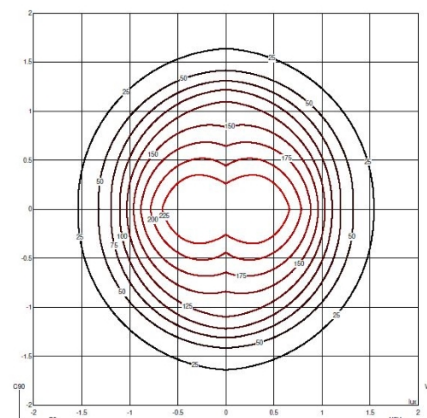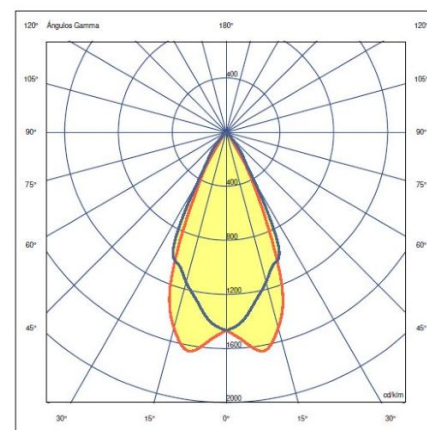

Efficiency 75.606 lm/W
Coordinate System CG
Total Flux 1035.8 lm
Maximum Value 1035.8 lm

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty