


139400XX 139410XX


139400XX 139410XX

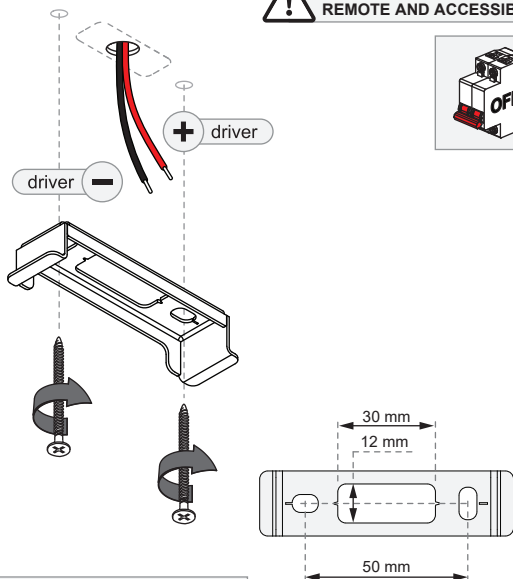


ELECTRICAL SPECS LED-FIXTURE			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	11,2	13,2	4,1
500	11,2	13,2	6,1
 RED		 BLACK	

For serial connection, respect polarity!
 Not suited for connection to mains voltage.
 Combine with a Modular LED-driver.

SCREWS NOT INCLUDED



! SERIAL CONNECTION:

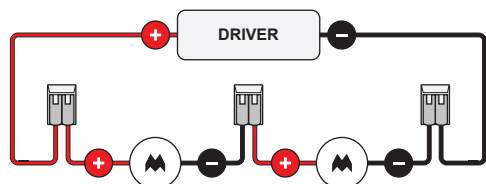


Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!


DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.



2

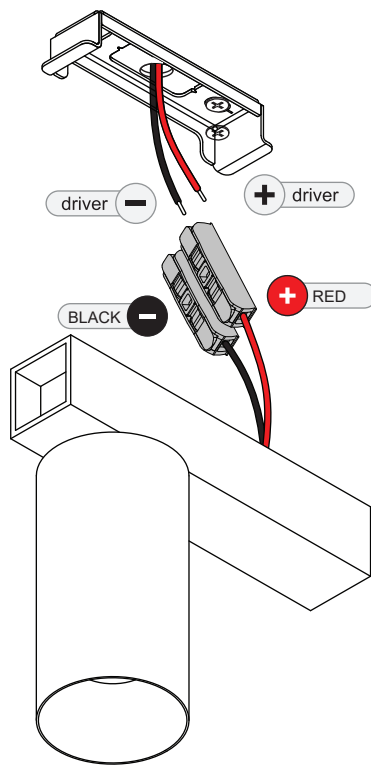

3

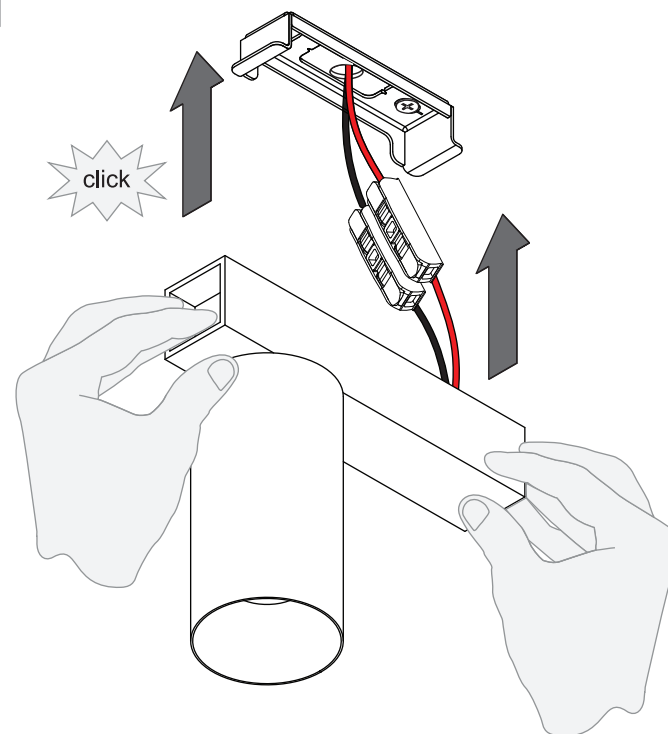

4

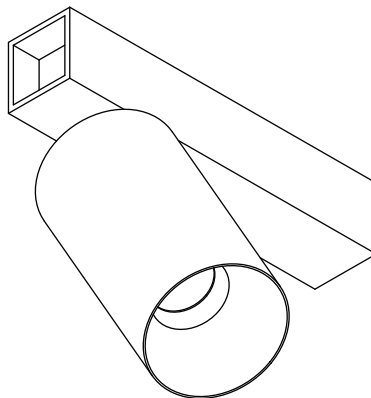

 ONLY TO BE INSTALLED OUTSIDE ARM'S REACH

5	UNINSTALL
---	-----------

