


Date
Customer
Project
Type


M-LED Module 70 1x LED 2700K Medium DE White Structure



Specifications

Material	14070109	
Light Source Type	LED	
LED Type	BRIDGELUX V8G6	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	2700K	
Lifetime	L80B20 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	1	
Binning (SDCM)	3	
Optic	Reflector	
Input Voltage	Constant Current Driver Required	
Electrical Class	III	
IP Rating	20	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Adjustability	Not Applicable	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	White, Structure	
Gross weight (g)	183.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	16,5	17,1
Max. forward voltage (Vf)	19,2	19,8
Connected load (W)	6,2	9,2
Delivered lumens (lm)	519	667
Efficacy (lm/W)	84	73
Glare rating	20	21

TM30 & CRI diagram

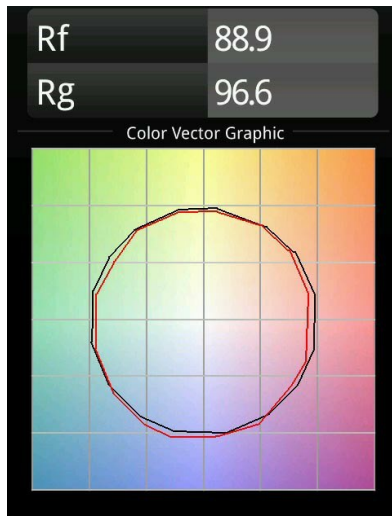

Light distribution & beam diagram

