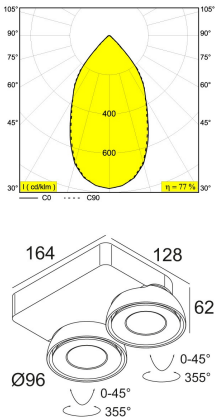


TWEETER M ON 2 93050 WDL
418 51 812 933 WDL

[Weblink](#)







Available colors:	BLACK-CHROMED (418 51 812 933 WDL B-C)
	WHITE-WHITE (418 51 812 933 WDL W-W)
ADJUSTABLE 0° - 45° / 355°	
INCL.2 x LED WHITE 10,4W / CRI>90 / 3000K / 1075lm	
INCL.2 x REFLECTOR WFL-50°	
INCL. WIRELESS DIMMABLE CONTROL 48V-DC	
EXCL. LED POWER SUPPLY 48V-DC	
LED Technics:	Light source: 2150 lm // 20 W // 110 lm/W Luminaire: 1648 lm // 24 W // 69 lm/W
48V-DC	
Class:	III
Weight:	1.3 KG
Protection level:	IP20
Minimum distance:	n.a.
Requirements:	LED POWER SUPPLY 48V-DC
For detailed installation instructions, please consult the manual. 418 51 812 XXX HAND.pdf	

TWEETER M ON 2 93050 WDL
418 51 812 933 WDL

Related references

LED POWER SUPPLIES

Weblink / Specs sheet  LED POWER SUPPLY 48V-DC / 100W DIN 300 89 48 100 110-240V / 50-60Hz	Weblink / Specs sheet  LED POWER SUPPLY 48V-DC / 150 W 300 89 48 150 220-240V / 50-60Hz	Weblink / Specs sheet  LED POWER SUPPLY 48V-DC / 240W DIN 300 89 48 240 100-240V / 50-60Hz	Weblink / Specs sheet  LED POWER SUPPLY 48V-DC / 90 W 300 89 48 90 110-240V / 50-60Hz
---	--	---	--

TWEETER M ON 2 93050 WDL
418 51 812 933 WDL

Related project picture of product family:

