


MISS K


Designed by Philippe Starck, 2003

F6255030

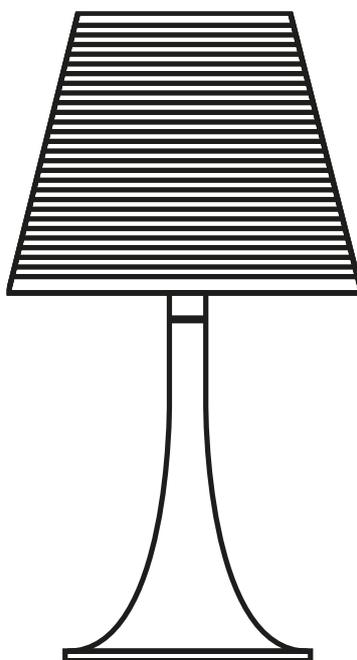

MISS K F6255030

EN

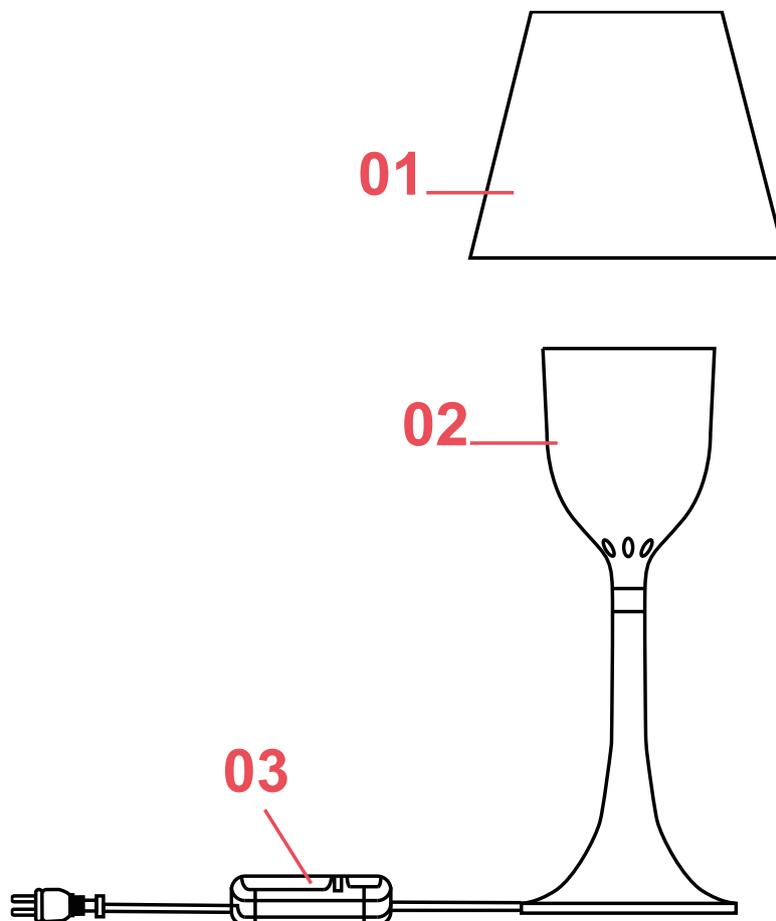

01. RF6255005 – Black diffuser

02. RF11791 – Internal diffuser

03. RF28207 – Black Led dimmer 1004P LFP100-240V 4-150WHL

MISS K F6255030

EN

RF6255005

BLACK DIFFUSER ASSEMBLY



WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

MISS K F6255030

EN

RF6255005

BLACK DIFFUSER ASSEMBLY

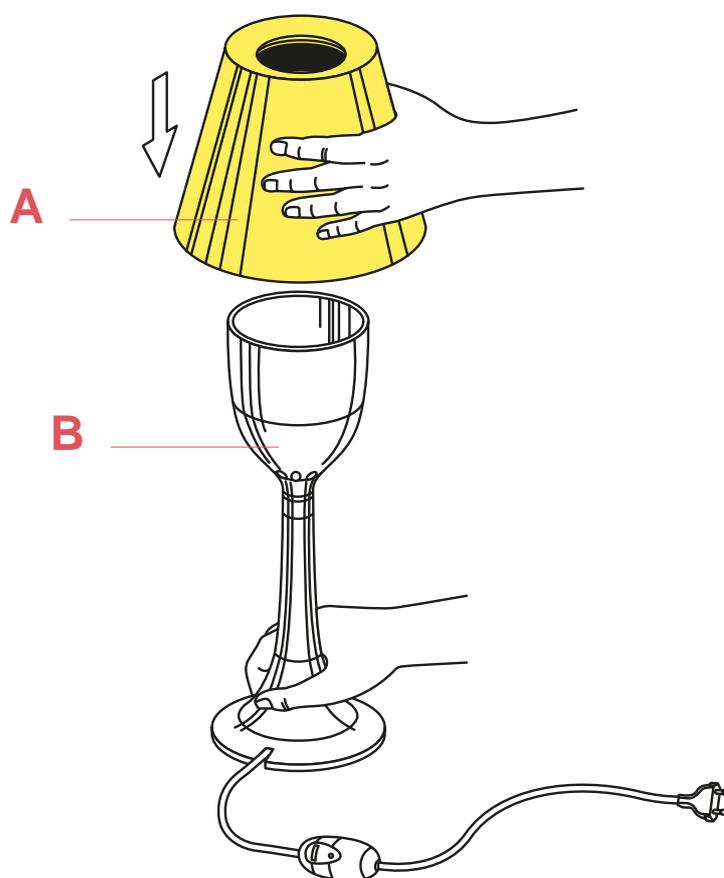


Fig.1

Lock the external diffuser (A) to the inner diffuser (B) by forcing (pushing) it to clicks-on.

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

MISS K F6255030

EN

RF11791

INTERNAL DIFFUSER



WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - www.flos.com
Flos reserves the right to introduce any changes to its own models, without prior notice.

MISS K F6255030

EN

RF11791

INTERNAL DIFFUSER

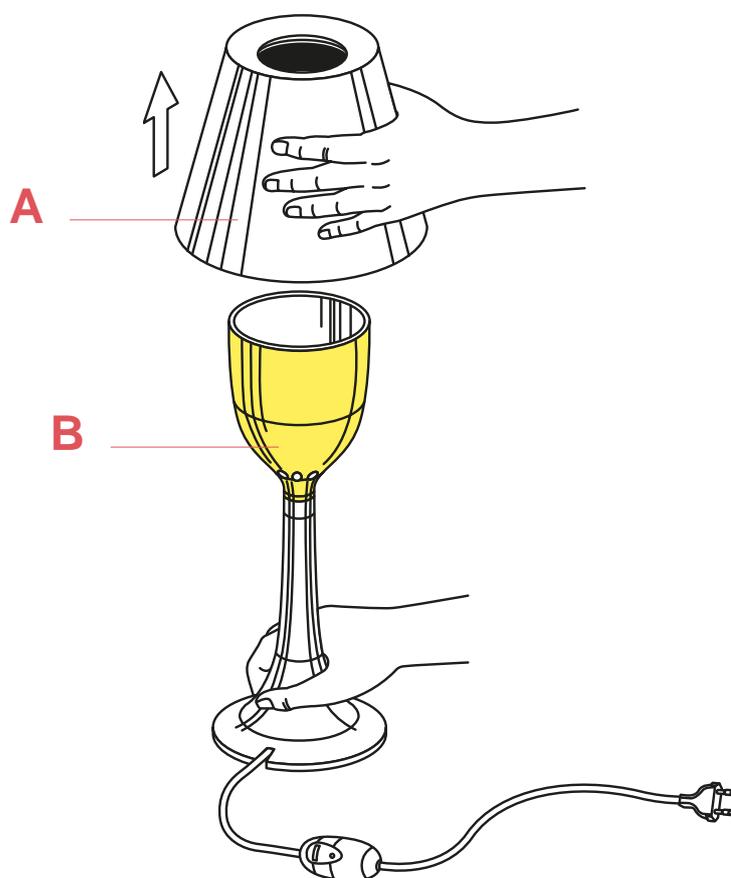


Fig.1

Remove the external diffuser (A) from the internal diffuser (B).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

MISS K F6255030

EN

RF11791

INTERNAL DIFFUSER



Fig.2

Remove the lamp bulb.

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

MISS K F6255030

EN

RF11791

INTERNAL DIFFUSER

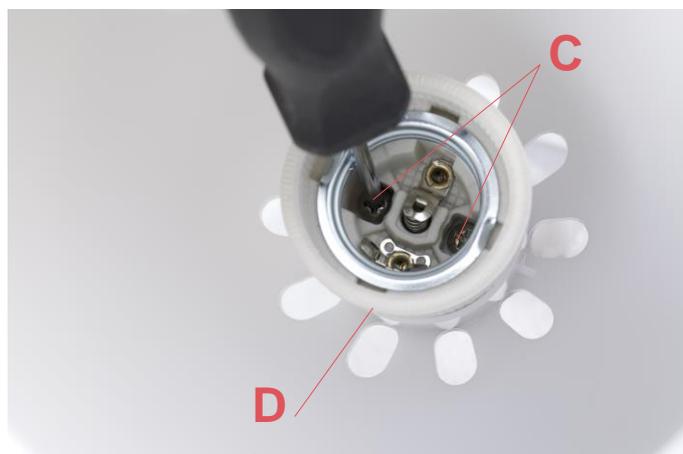


Fig.3

Unfasten the 2 screws (C) inside the lamp holder (D).

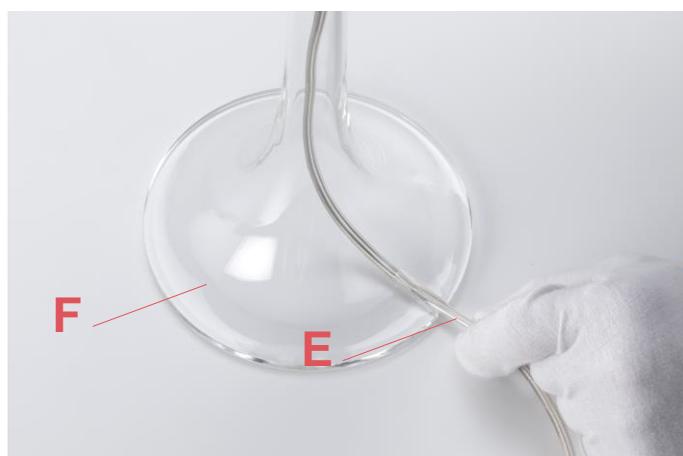


Fig.4

Push through the lamp base (F) some spare electrical cable (E).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

MISS K F6255030

EN

RF11791

INTERNAL DIFFUSER



Fig.5

Extract the lamp holder (D) from the internal diffuser (B).

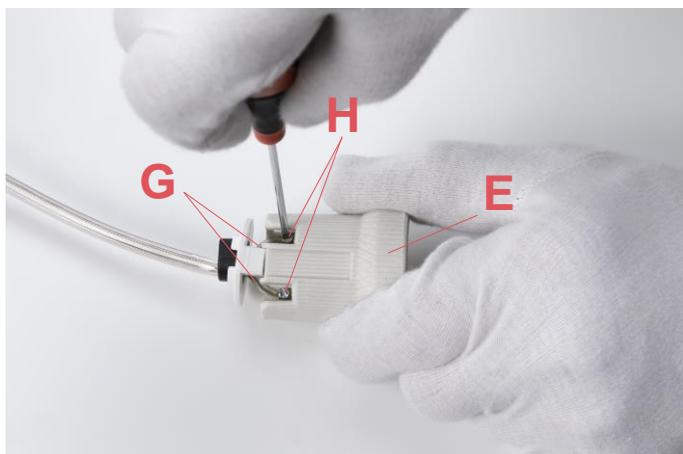


Fig.6

Disconnect the electrical wires (G) from the terminals (H) of the lamp holder (D).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

MISS K F6255030

EN

RF11791

INTERNAL DIFFUSER

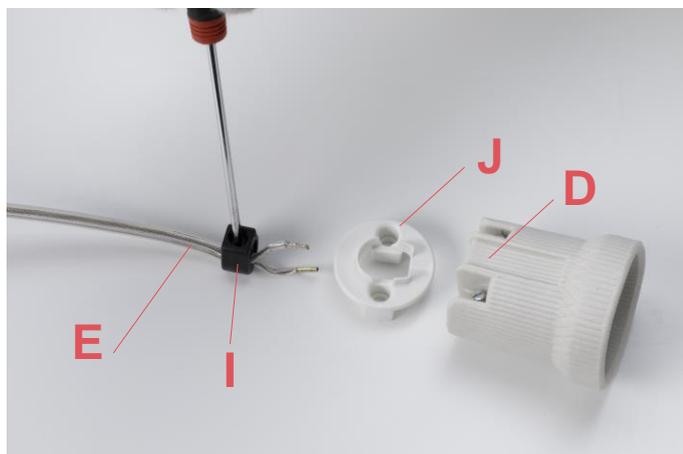


Fig.7



Fig.8

Unfasten the screw of the cable clamp (I). Slide-off from the electrical cable (E) the lamp holder (D), lamp holder support (J) and cable clamp (I). (Fig.7)

Unfasten the internal diffuser (B) from the lamp base (F). (Fig.8)

Assemble now the new spare-part:
Fasten the internal diffuser (B) on the lamp base (F). (Fig.8)

Insert through the electrical cable (E), the cable clamp (I) and the lamp holder support (J). Connect the wires to the terminals (H) of the lamp holder (D) respecting the polarities and fasten the screw of the cable clamp (I). (Fig.7)

Insert the lamp holder (D) in his apposite position inside the internal diffuser (B). (Fig.5 page 9)

Pull-out the excess cable (E) present inside the lamp base (F). (Fig.4 page 8)

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

MISS K F6255030

EN

RF11791

INTERNAL DIFFUSER



Fig.9

Install the lamp bulb.

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

MISS K F6255030

EN

RF11791

INTERNAL DIFFUSER

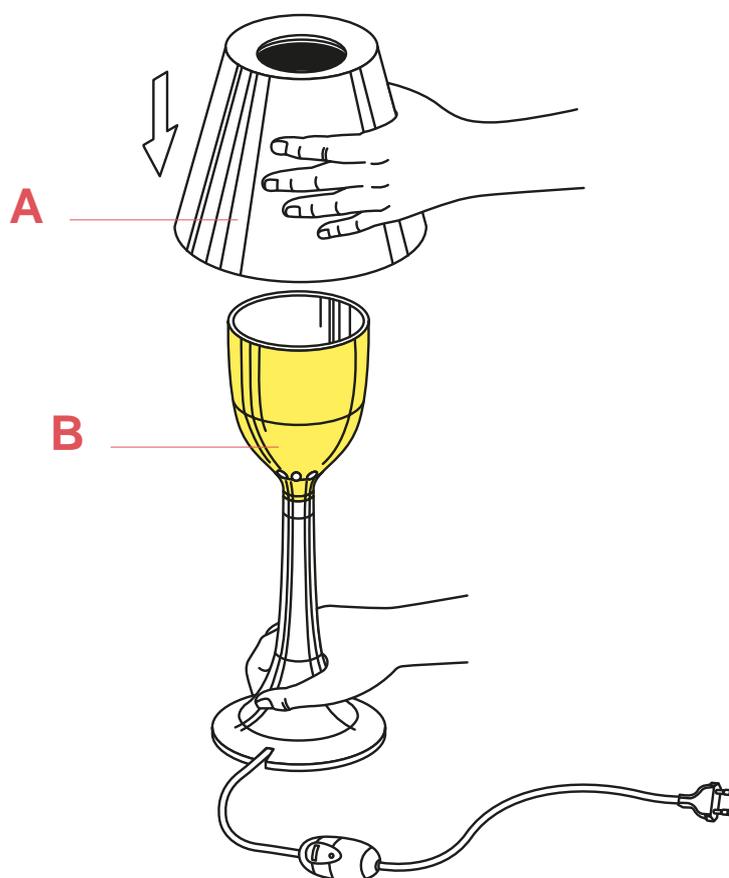


Fig.10

Install the external diffuser (A) on the internal diffuser (B).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

MISS K F6255030

EN

RF28206

BLACK LED DIMMER 1004P LFP100-240V 4-150WHL



Bedside
Gun
p.12



Chiara T
p.03



Glo-ball
Basic 0
p.11



Glo-ball
Basic 1
p.14



Glo-ball
Basic 2
p.05



Glo-ball
T1
p.11



Ic T1
High
p.08




Ic T1
Low
p.08



Ic T2
p.08



Ktribe T1
p.05



Ktribe T2
p.05



Miss K
p.13



Ray T
p.17




Romeo
Moon T1
p.32



Romeo
Soft T1
p.32



Spun
Light T1
p.12



Spun
Light T2
p.12




Table
Gun
p.12

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

MISS K F6255030

EN

RF28206

BLACK LED DIMMER 1004P LFP100-240V 4-150WHL



Fig.1



Fig.2

Open the dimmer box of the damaged dimmer. For the opening, it is necessary to remove the n°2 screws using a star screw driver.

Lift-up the dimmer casing from the dimmer base;

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

MISS K F6255030

EN

RF28206

BLACK LED DIMMER 1004P LFP100-240V 4-150WHL

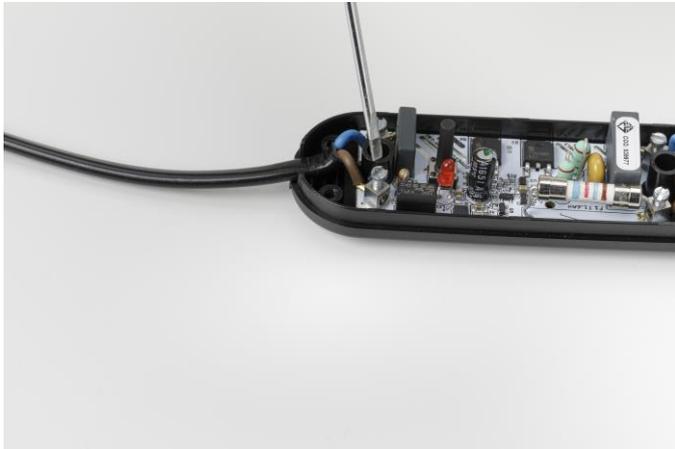


Fig.3

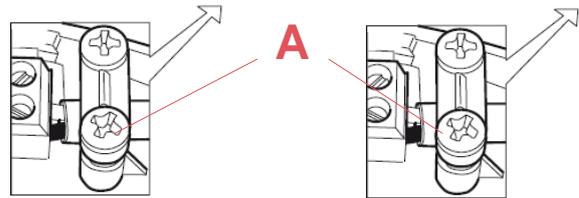


Fig.3.1

Remove the cable clamps by unfastening the 4 screws (A) and disconnect the wires from the terminal blocks through a tiny flat headed screw driver;



Fig.4

Replace the dimmer and connect the wires. When connecting the wires it is necessary to respect the polarities (L = Brown and N = Blue) to the terminal box.

Lock the electrical cables by fastening the screws (A) of the cable clamps and make sure to block the isolation of the electrical cable.

Close the dimmer box.

It is necessary to place the casing on top and press down until it locks in.

it is necessary to insert the n°2 screws using a star screw driver

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.