



Light Stripe 900 mm

■ 03.7004.14 - Black

Diffused LED light module to be installed in The Running Magnet System. Opaline end caps to create continuous lines of light included.

Diffused LED light module to be installed in The Running Magnet System. Opaline end caps to create continuous lines of light included.

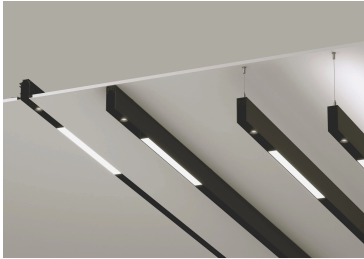


Main specifications

Lamp category	LED	Mountings	Track
Power	22.5W	Environment	Indoor
CCT	2700K		
CRI	90		
Net lumen (lm)	1249		

Optical

Lighting type	Direct
LED type	Top LED
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	108
Beam angle C90-270 (°)	105



Luminous flux luminaire
1249 lm

Beam Angle: 105°

h(m)	E(lx)	D(m)
1	447	2.76
2	112	5.52
3	50	8.28
4	28	11.04
5	18	13.81




Electrical

Voltage (V)	24.00	Emergency	Without
Lamp holder	LED	Insulation class	III
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic		

Physical

Color	Black
Orientation	Fixed
Weight (kg)	1.02
Length (mm)	906

Certification / Marking



Note

For wireless lighting control, choose integrated Casambi versions. For the sizing of the installation keep a safety margin of 15% of the maximum power of the LED power source.